


# Product data sheet

Specifications

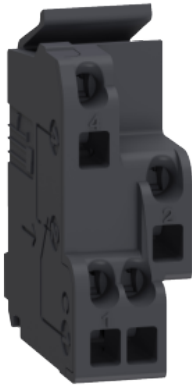

Standard auxiliary contact, circuit breaker status OF/SD/SDE/SDV, 1 changeover contact type, screwless spring terminals

29450

## Main

<b>Product or component type</b>	Auxiliary contact
<b>Device short name</b>	OF SD SDE SDV
<b>Device application</b>	Breaker status monitoring
<b>Range compatibility</b>	ComPact (ComPact NS630b...1600) ComPact (ComPact NS1600b...3200) ComPact (ComPactT INS) ComPact (Compact INV) ComPact (ComPact NSX) EasyPact (EasyPact CVS) PowerPact (PowerPact Multistandard) ComPact (ComPact NSX DC)
<b>Signal contacts composition</b>	1 NO/NC

## Complementary

<b>Fault type</b>	General electric fault
<b>Local signalling</b>	ON/OFF indication for open/close Trip indicator for relay trip indicator Fault trip for electrical fault
<b>Auxiliary contacts type</b>	Standard
<b>Mounting mode</b>	Clip-on
<b>[I<sub>th</sub>] conventional free air thermal current</b>	5 A
<b>Breaking capacity (A)</b>	AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz DC-12: 6 A at 24 V DC 50/60 Hz DC-12: 2.5 A at 48 V DC 50/60 Hz DC-12: 0.6 A at 110 V DC 50/60 Hz DC-12: 0.3 A at 250 V DC 50/60 Hz DC-14: 1 A at 24 V DC 50/60 Hz DC-14: 0.2 A at 48 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.03 A at 250 V DC
<b>Minimum load</b>	100 mA at 24 V DC

<b>Auxiliary connection terminal</b>	Spring 0.5...1.5 mm <sup>2</sup> (AWG 20...AWG 16)
<b>Accessory / separate part category</b>	Spare part for Compact NS630b...1600 Spare part for Compact NS1600b...3200

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	1.400 cm
<b>Package 1 Width</b>	7.000 cm
<b>Package 1 Length</b>	7.000 cm
<b>Package 1 Weight</b>	16.900 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	4.500 cm
<b>Package 2 Width</b>	16.000 cm
<b>Package 2 Length</b>	16.000 cm
<b>Package 2 Weight</b>	177.000 g
<b>Unit Type of Package 3</b>	S03
<b>Number of Units in Package 3</b>	300
<b>Package 3 Height</b>	30.000 cm
<b>Package 3 Width</b>	30.000 cm
<b>Package 3 Length</b>	40.000 cm
<b>Package 3 Weight</b>	5.785 kg

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
<b>PVC free</b>	Yes
<b>Halogen content performance</b>	Halogen free plastic parts product

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Recommended replacement(s)