

CUSTOMER P/N:

Rev.	DATA	NOTES
V1.0	2018.10.19	New issue

A

B

C

D

E

F

A




B

C

D

E

F

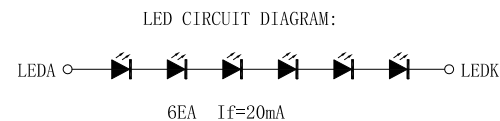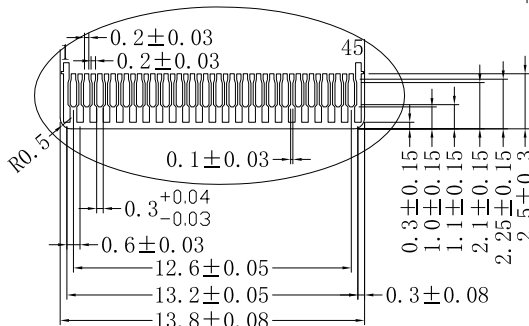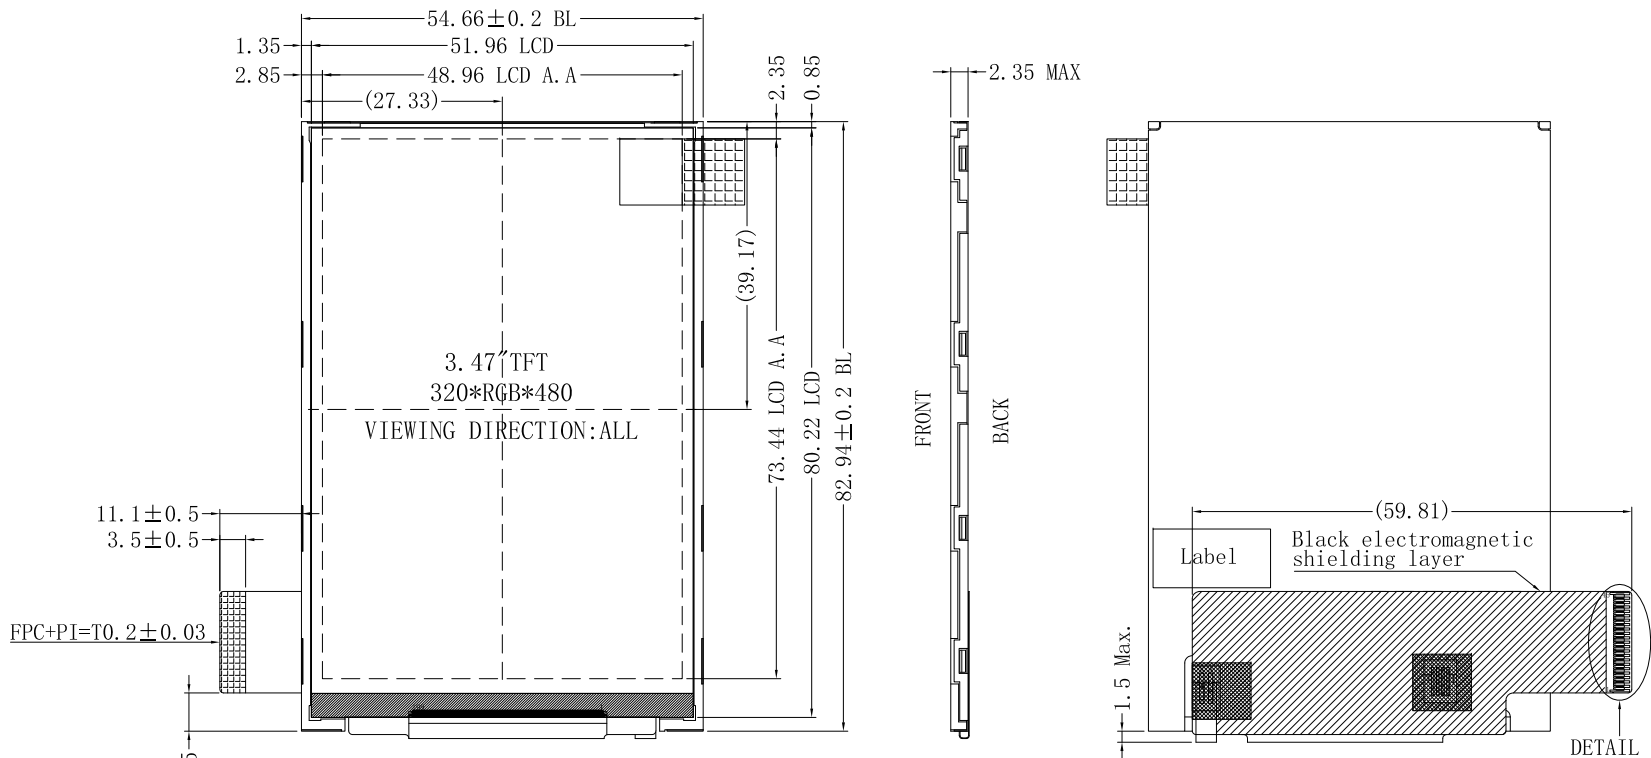

PIN	SYMBOL
1	GND
2	LED A
3	LED A
4	LED K
5	LED K
6	GND
7	GND
8	VCC
9	IOVCC
10	RESET
11	GND
12	GND
13	GND
14	GND
15	GND
16	GND
17	GND
18	GND
19	D15
20	D14
21	D13
22	D12
23	D11
24	D10
25	D09
26	D08
27	D07
28	D06
29	D05
30	D04
31	D03
32	D02
33	D01
34	D00
35	NC
36	GND
37	RDX
38	WRX
39	D/CX
40	CSX
41	NC
42	XR
43	YD
44	XL
45	YU

- NOTES:
- 1.DISPLAY TYPE: 3.47" TFT
  - 2.DISPLAY MODE: Transmissive
  - 3.VIEW DIRECTION: ALL
  - 4.OPERATION TEMPERATURE: -20°C~+70°C  
STORAGE TEMPERATURE: -30°C~+80°C
  - 5.GENERAL TOLERANCE: ±0.2
  - 6.DRIVER IC : ILI9488
  - 7.RECOMMENDED CONNECTOR: FH26-45S-0.3SHW
  - 8.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS

Customer Approval	Drawn:	Lucien	<b>DLC Display Co., Ltd</b>			
	Checked:					
	Approved:		Title	TFT LCM OUTLINE	Unit	mm
	Critical Dim.	<input type="checkbox"/>	Part No.	DLC0347BBP06CF-1	Scale	1:1
	Reference Dim.	( )	Revison	V1.0	Page	1/1
			Date	2018-10-19	3 <sup>rd</sup> Angle	