

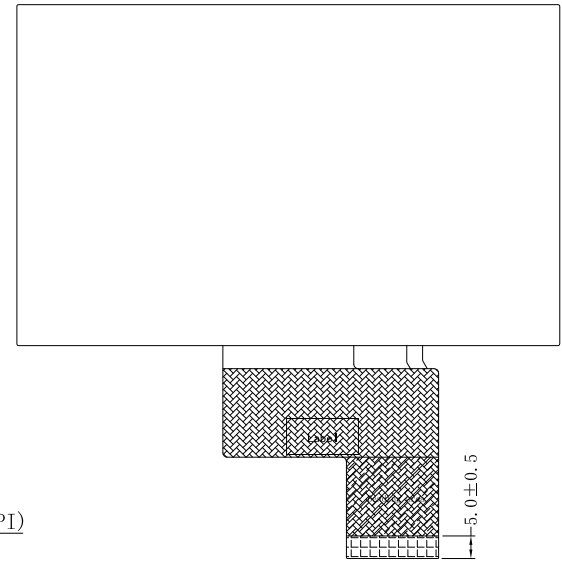
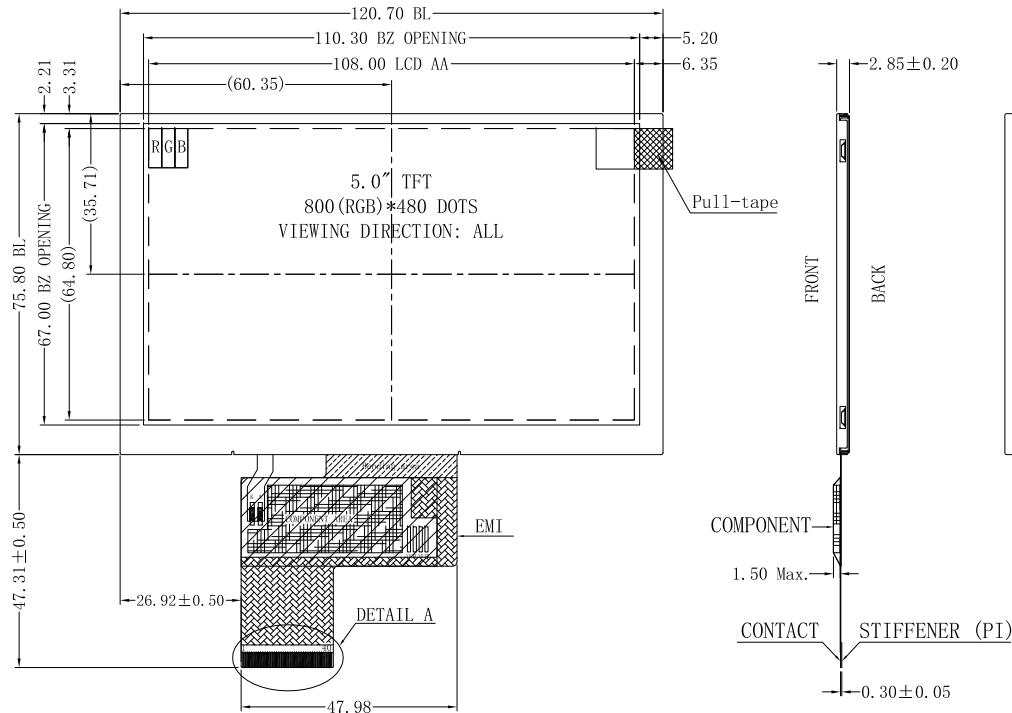


CUSTOMER P/N:

Rev.	DATE	NOTES
V1.0	2020.10.26	New issue

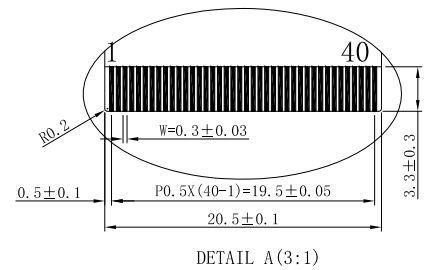

PIN	SYMBOL
1	LED-K
2	LED-A
3	NC
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

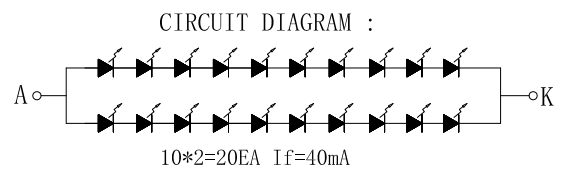

- NOTES:
- 1.DISPLAY TYPE: 5.0" IPS
 - 2.DISPLAY MODE: TRANSMISSIVE, Normally Black
 - 3.VIEW DIRECTION: ALL
 - 4.OPERATION TEMPERATURE: -20°C~+70°C
STORAGE TEMPERATURE: -30°C~+80°C
 - 5.GENERAL TOLERANCE: ±0.2
 - 6.DISPLAY DRIVER IC: ST7262
 - 7.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS

Customer Approval	Drawn:	DLC Display Co., Ltd			
	Checked:				
	Approved:	Title	TFT LCM OUTLINE	Unit	mm
	Critical Dim. <input type="checkbox"/>	Part No.	DLC0500ACP20RF-4	Scale	1:1
	Reference Dim. < >	Revison	V1.0	Page	1/1
	Date	2020-10-26	3 rd Angle		