

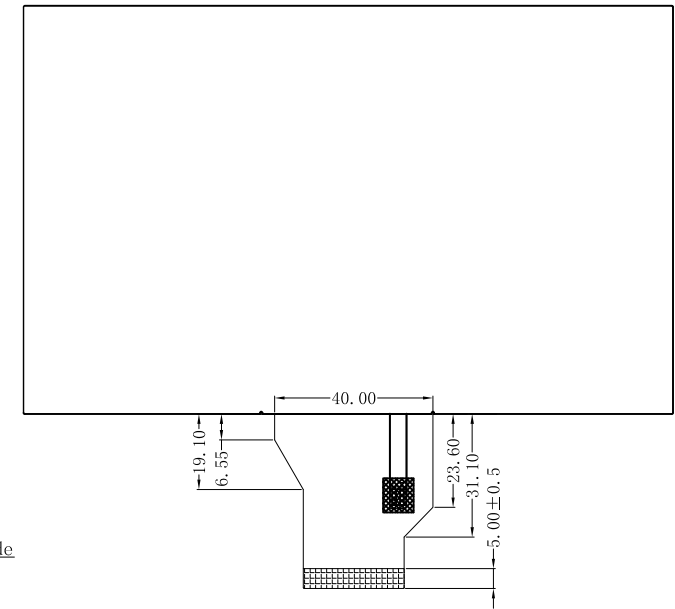
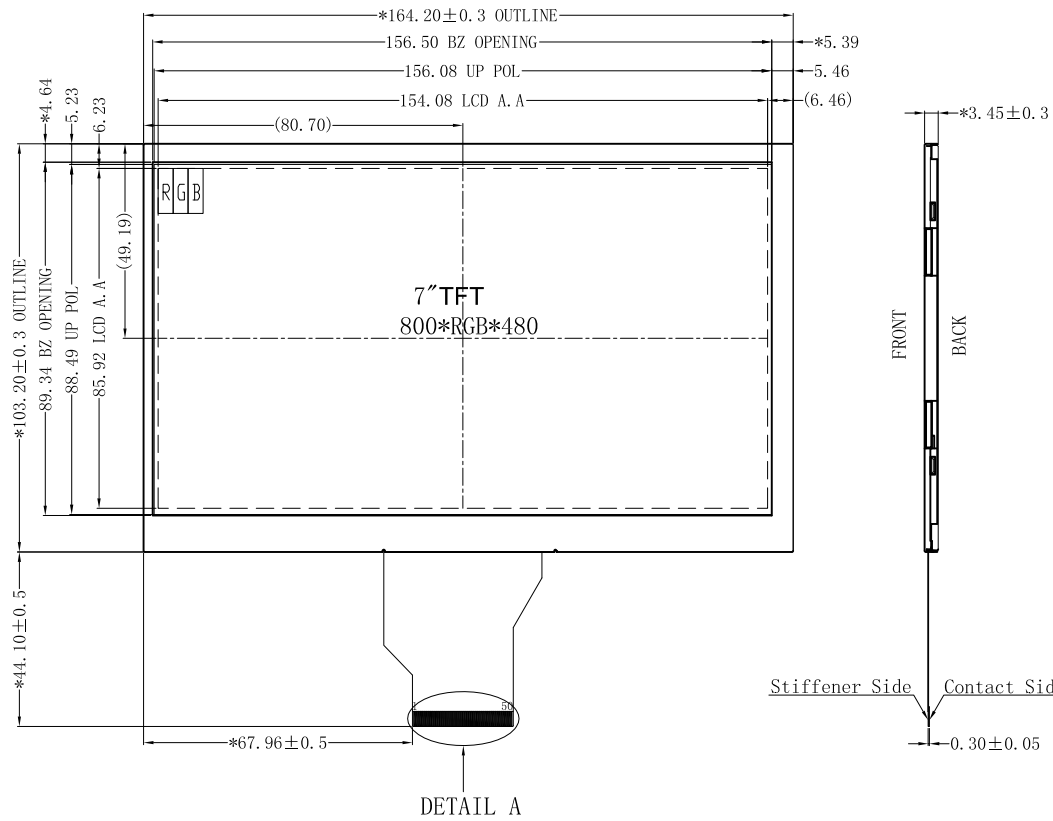


| No: | PIN NAME |
|-----|----------|
| 1 | VLED+ |
| 2 | VLED+ |
| 3 | VLED- |
| 4 | VLED- |
| 5 | GND |
| 6 | VCOM |
| 7 | DVDD |
| 8 | MODE |
| 9 | DE |
| 10 | VS |
| 11 | HS |
| 12 | B7 |
| 13 | B6 |
| 14 | B5 |
| 15 | B4 |
| 16 | B3 |
| 17 | B2 |
| 18 | B1 |
| 19 | B0 |
| 20 | G7 |
| 21 | G6 |
| 22 | G5 |
| 23 | G4 |
| 24 | G3 |
| 25 | G2 |
| 26 | G1 |
| 27 | G0 |
| 28 | R7 |
| 29 | R6 |
| 30 | R5 |
| 31 | R4 |
| 32 | R3 |
| 33 | R2 |
| 34 | R1 |
| 35 | R0 |
| 36 | GND |
| 37 | DCLK |
| 38 | GND |
| 39 | L/R |
| 40 | U/D |
| 41 | VGH |
| 42 | VGL |
| 43 | AVDD |
| 44 | RESET |
| 45 | NC |
| 46 | VCOM |
| 47 | DITHB |
| 48 | GND |
| 49 | NC |
| 50 | NC |

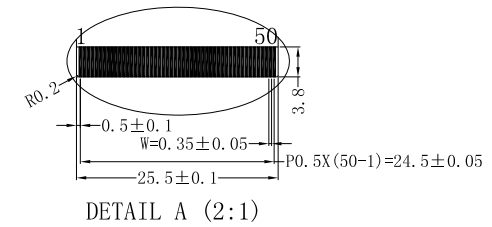

LED CIRCUIT DIAGRAM:

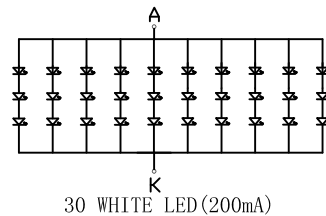

NOTES:

- 1.DISPLAY TYPE: a-Si TFT
- 2.POLARIZER MODE: TRANSMISSIVE, Normally White
- 3.OPERATING TEMP: -20°C ~ 70°C
- 4.STORAGE TEMP: -30°C ~ 80°C
- 5.BACKLIGHT: LED
- 6.RoHs Complicant

DLC Display Co., Limited
www.dlcdisplay.com

| | | |
|---------------|---------------------|----------|
| DRAWN BY: | TITLE: DLC0700BZG-7 | |
| CHECKED BY: | DWG NO: | |
| APPROVED BY: | DWG NAME: | UNIT: mm |
| CONFIRMED BY: | SHEET NO: OF | |