

3.0mm(.118") WAFER 180 DUAL ROW

MATERIAL

Insulator: LCP UL 94V-0
 Color: Black
 Contact: Brass
 Plating: Gold plated/Tin plated



SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 5.0A AC/DC
 Voltage rating: 250V AC/DC
 Dielectric withstand voltage: 1500V AC/minute
 Contact resistance: 0.01Ω Max.
 Mates with S.Y.E. R2660-D3-xxM Housing



Order Information

R 2661-D3-xx x S-LCP-1
 1 2 3 4 5 6 7 8

1. RoHS
2. Series NO.
3. Pitch 3.0mm
4. Pin No.
5. Plating:
 G:Gold plated
 T: Tin plated
6. Straight angle
7. LCP
8. Serial No.

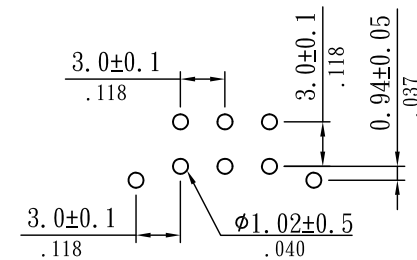

PCB LAYOUT

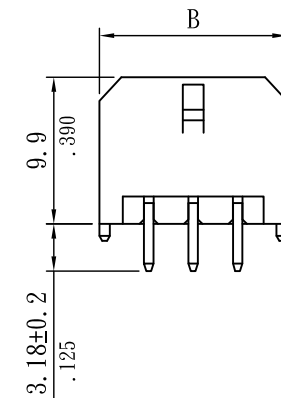

Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in
2			6.65	0.262	14	18.00	0.709	24.65	0.970
4	3.00	0.118	9.65	0.380	16	21.00	0.827	27.65	1.089
6	6.00	0.236	12.65	0.498	18	24.00	0.945	30.65	1.207
8	9.00	0.354	15.65	0.616	20	27.00	1.063	33.65	1.325
10	12.00	0.472	18.65	0.734	22	30.00	1.181	36.65	1.443
12	15.00	0.591	21.65	0.852	24	33.00	1.299	39.65	1.561

 Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M044	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2023.08.15	UNIT: mm(in.)	A					LINEAR±	.0 ±0.25(.010)
CHECKED			CAD NO	B						.00 ±0.15(.006)
APPROVED			R2661-D3-xxxS-LCP-1	C						.000±0.05(.002)
PART NO	R2661-D3-xxxS-LCP-1		APPROVED						PROJECTION:	