






2.54mm(.100") BOX HEADER 180° TYPE

MATERIAL


Insulator: PBT UL94V-0
 Color: Black
 Contact: Copper alloy 0.64mm(.025") square pin
 Plating: Gold plated

SPECIFICATIONS

Temperature range: -55°C ~ +105°C
 Current rating: 3A
 Dielectric withstand voltage: 1000V AC/minute
 Insulation resistance: 1000 MΩ Min.

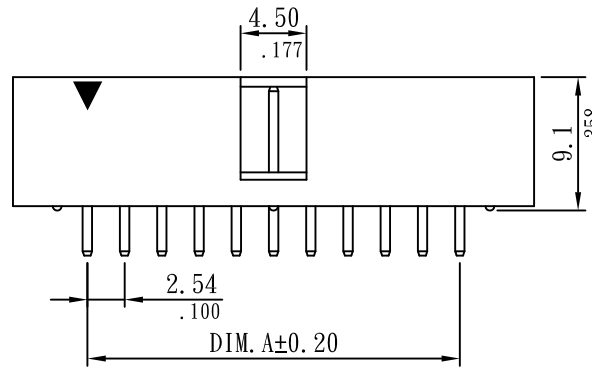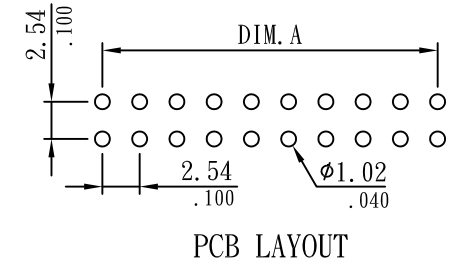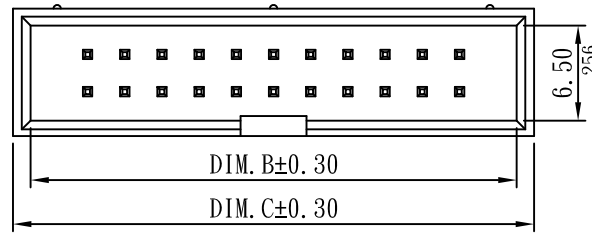

6~50 Circuits



60、64 Circuits

Order Information

R 3010-xx G S
 1 2 3 4 5

1. RoHS
2. Series
3. Pin No.
4. Gold plated
5. Straight angle

Dimensional Information

Circuits	DIM. A		DIM. B		DIM. C		Circuits	DIM. A		DIM. B		DIM. C	
	mm	in	mm	in	mm	in		mm	in	mm	in	mm	in
6	5.08	0.200	12.94	0.509	15.24	0.600	26	30.48	1.200	38.34	1.509	40.64	1.600
8	7.62	0.300	15.48	0.609	17.78	0.700	30	35.56	1.400	43.42	1.709	45.72	1.800
10	10.16	0.400	18.02	0.709	20.32	0.800	34	40.64	1.600	48.50	1.909	50.80	2.000
12	12.70	0.500	20.56	0.809	22.86	0.900	40	48.26	1.900	56.12	2.209	58.42	2.300
14	15.24	0.600	23.10	0.909	25.40	1.000	44	53.34	2.100	61.20	2.409	63.50	2.500
16	17.78	0.700	25.64	1.009	27.94	1.100	50	60.96	2.400	68.82	2.709	71.12	2.800
20	22.86	0.900	30.72	1.209	33.02	1.300	60	73.66	2.900	81.52	3.209	83.82	3.300
24	27.94	1.100	35.80	1.409	38.10	1.500	64	78.74	3.100	86.60	3.409	88.90	3.500



Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M065	NAME	DATE	SCALE: 2:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	PC	2010.10.09	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	ALBERT	2010.10.09	CAD NO	B						.00 ±0.20(.008)
APPROVED	TINA	2010.10.09	R3010-xxGS	C						.000±0.10(.004)
PART NO	R3010-xxGS								PROJECTION:	