

2.54mm(.100") DIP PLUG (.100" x .300")

MATERIAL

Insulator: PBT UL 94V-0
 Color: Black
 Contact: Copper alloy
 Plating: Gold flash or gold plating on contact, tin plating on solder tail

SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 1.0A
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.

Order Information



R 3110-xxP

1 2 3





1. RoHS
2. Series No.
3. Pin No.

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
8	7.62(0.300)	15.42(0.607)	24	27.94(1.100)	35.74(1.407)
10	10.16(0.400)	17.96(0.707)	26	30.48(1.200)	38.28(1.607)
14	15.24(0.600)	23.04(0.907)	28	35.56(1.400)	40.82(2.207)
16	17.78(0.700)	25.58(1.007)	34	40.64(1.600)	48.44(1.907)
18	20.32(0.800)	28.12(1.107)	40	48.26(1.900)	56.06(2.207)
20	22.86(0.900)	30.66(1.207)			

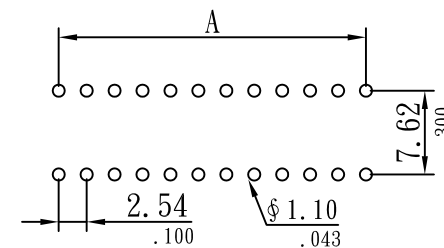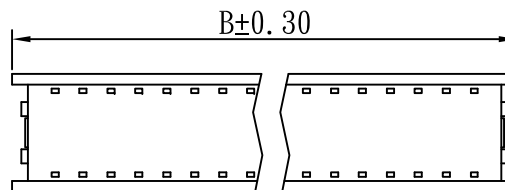

PCB LAYOUT

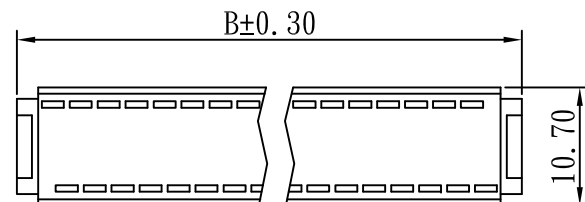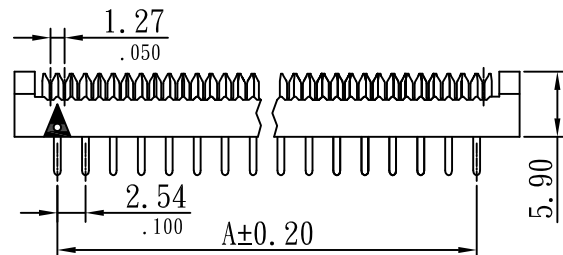

Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M065	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	YXF	2009.02.09	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	PIQI	2009.02.09	CAD NO	B						.00 ±0.20(.008)
APPROVED	MARS	2009.02.09	R3110-xxP	C						.000±0.10(.004)
									PROJECTION:	

PART NO R3110-xxP