

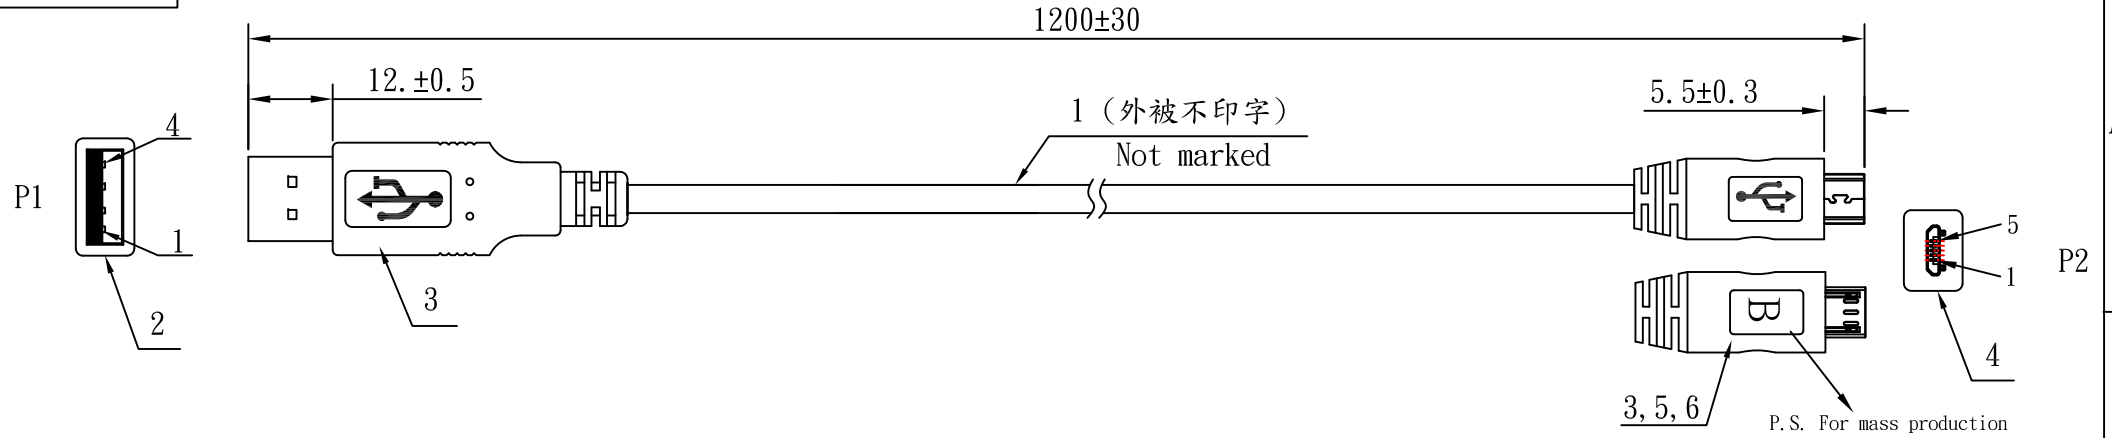


RoHS

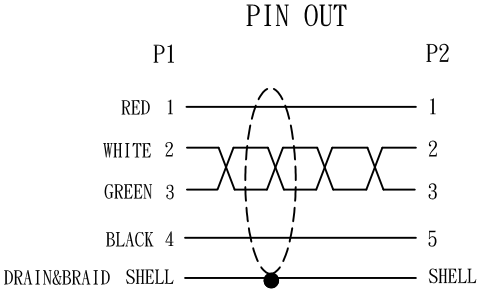

NO.	NAME	DESCRIPTION	Q' TY	SUPPLIER
1	CABLE	USB 2.0 CABLE UL2725#28x1P+#28x2C+AEB, OD:4.2mm, C=BLACK L=1185mm	1	
2	CONNECTOR	USB A TYPE MALE GOLD PLATING, PIERCED TYPE, WHITE INSULATOR	1	
3	PVC	PVC-BK10/80P	2	
4	CONNECTOR	MICRO USB B TYPE MALE, GOLD PLATING, PIERCED TYPE, BLACK INSULATOR	1	
5	TAPE	HI TEMP TAPE: W:6mm	1	
6	H. S. T.	R4100-010005 BLACK 1.0 ϕ x5mm	3	
7	MINI TIE	TIE-A/BK	2	

NOTE:PACKING:1PC/BAG (5"x6" x0.06mm)
 ELECTRICAL TEST CONDITIONS:
 1. 100% OPEN SHORT-TEST
 2. INSULATION RESISTANCE:10M OHM Min.
 3. CONDUCTION RESISTANCE:3 OHM Max.
 4. HI-POT:DC 300 V / 10 ms

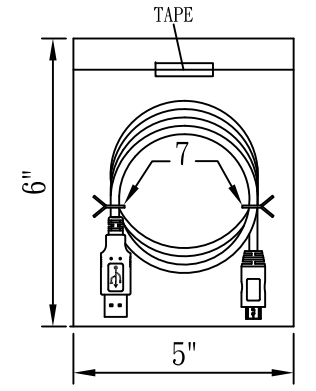

Sunny Young Enterprise Co., Ltd.
 S. Y. E <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan (R. O. C.)
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	WORK IN PROGRESS
DRAWN	STEVEN	2013. 10. 18-1	UNIT: mm(in.)	A					
CHECKED	KEVIN	2014. 01. 06	CAD NO	B					
APPROVED	MONICA	2014. 01. 06	RE193-USB1200-BLK	C					

PART NO RE193-USB1200-BLK