

MEB SERIES

Metallized Polyester Film Capacitor, Mini Box Type with 5mm Pitch


MEB are metallized polyester film with stacked technology as dielectric and encapsulated in plastic case with epoxy resin filled.

FEATURES

- High pulse strength
- High contact reliability
- Self-healing properties.

SPECIFICATIONS

1. Operating Temperature range : -40°C ~ +105°C
2. Capacitance Range : 0.001μF ~ 2.2μF.
3. Capacitance Tolerance : ±5%(J)
4. Rated Voltage : 63VDC, 100VDC
5. Dissipation Factor : 1.0% max. at 1KHz, 25°C
6. Insulation Resistance : >7,500 MΩ(C≤0.33μF), >2,500 MΩ·μF/C (C>0.33μF)
7. Voltage proof : 1.4UR (2s)

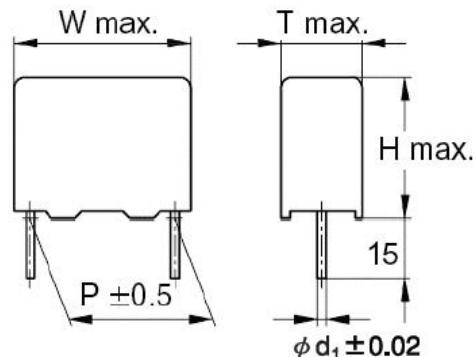

Unit : mm

CAP(μF)	RV	63VDC					100VDC					Packing units
		W	H	T	P	dø	W	H	T	P	dø	
SIZE												AMMO PACK
0.0010							7.3	6.5	2.5	5.0	0.5	2000
0.0015							7.3	6.5	2.5	5.0	0.5	
0.0022							7.3	6.5	2.5	5.0	0.5	2000
0.0033							7.3	6.5	2.5	5.0	0.5	
0.0047							7.3	6.5	2.5	5.0	0.5	2000
0.0068							7.3	6.5	2.5	5.0	0.5	
0.010							7.3	6.5	2.5	5.0	0.5	2000
0.015							7.3	6.5	2.5	5.0	0.5	
0.022							7.3	6.5	2.5	5.0	0.5	2000
0.033							7.3	6.5	2.5	5.0	0.5	
0.047							7.3	6.5	2.5	5.0	0.5	2000
0.068							7.3	6.5	2.5	5.0	0.5	
0.10							7.3	6.5	2.5	5.0	0.5	2000
0.15	7.3	6.5	3.0	5.0	0.5		7.3	6.5	3.0	5.0	0.5	2000 1500
0.22	7.3	8.0	2.5	5.0	0.5		7.3	8.0	3.5	5.0	0.5	2000 1500
0.33	7.3	6.5	3.0	5.0	0.5		7.3	8.0	3.5	5.0	0.5	1500
0.47	7.3	8.0	3.5	5.0	0.6		7.3	9.5	4.5	5.0	0.6	1500 1000
0.68	7.3	9.5	4.5	5.0	0.6		7.5	10.5	6.0	5.0	0.6	1000
1.00	7.3	9.5	4.5	5.0	0.6		7.8	13.0	7.8	5.0	0.6	1000 500
1.5	7.5	10.5	6.0	5.0	0.6							1000
2.2	7.8	13.0	7.8	5.0	0.6							500