
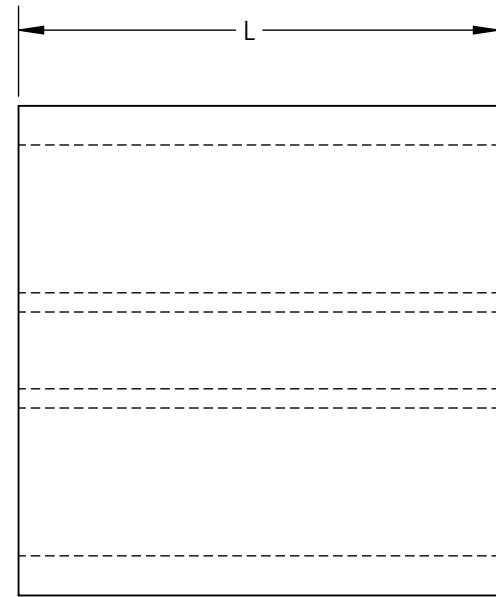


NOTES:

1. GENERAL SPECIFICATIONS: BIVAR EXTRUDED PROFILE SPECIFICATIONS: BV00-M101.
2. MATERIAL: PVC ALLOY, 94V-0 COMPLIANT, BLACK.
3. TOLERANCE "L" DIMENSION:
0.030 - 0.500 (1.0 - 12.7 mm)±0.005 (0.1mm)
0.505 - 0.750 (12.8 - 19.1 mm)±0.008 (0.2mm)
0.755 - 1.250 (19.2 - 31.8 mm)±0.015 (0.4mm)

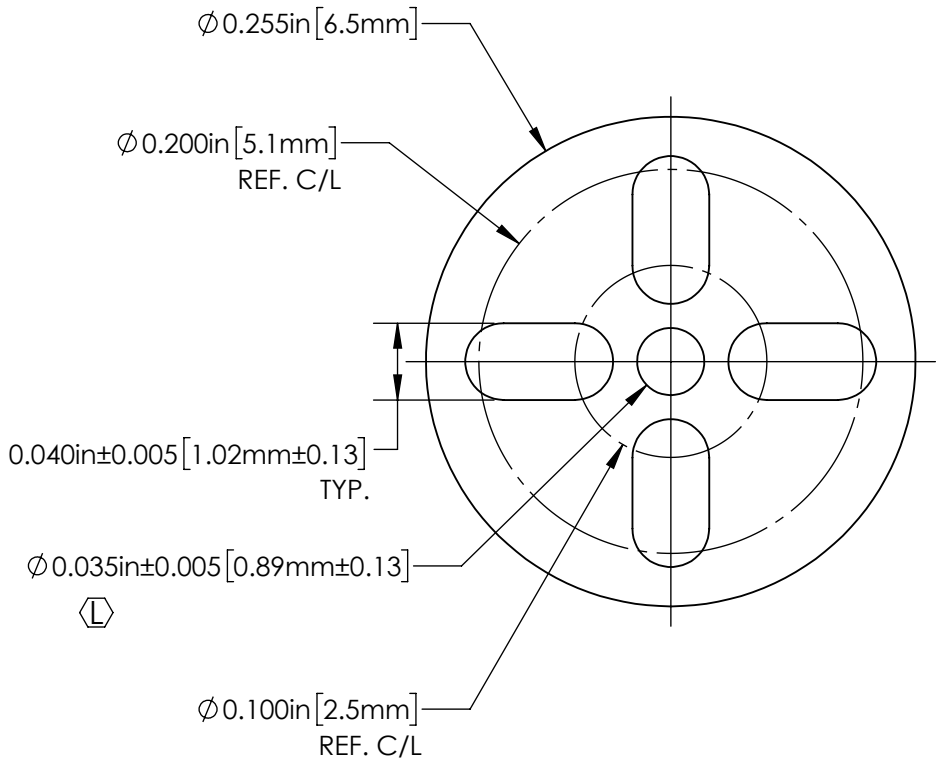

CUSTOMER USE DRAWING

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	TITLE: EXTRUDED, SELF-RETAINING LED MOUNT	
.XX ± .01			
.XXX ± .005		DRAWING NO: ELM 3-XXX REVISION: L	
DESIGNED: S. IRVING	DATE: 02/03/98	SHEET SIZE A CAGE CODE: 32559	
REVISED: D. ASHBY	DATE: 11/12/24	SCALE: 5:1 SHEET # 1 OF 1	
CHECKED: K. BARON	DATE: 08/14/18	CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING	