

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利及外观设计注册外, 其他内容均受法律保护。未经许可, 不得复制或传播。本公司保留所有权利。侵权必究。

FOR-1755 Rev.1.7

2

3





4

5


6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

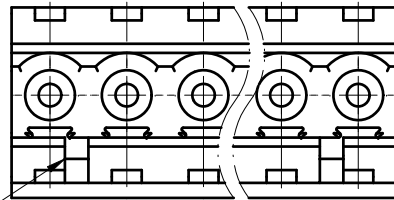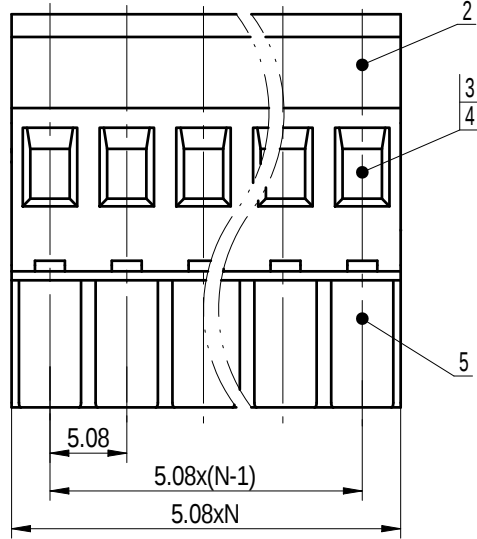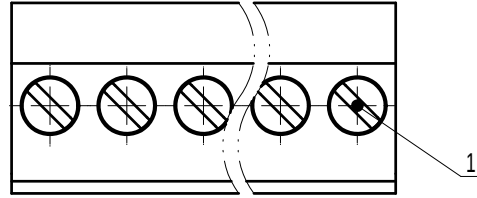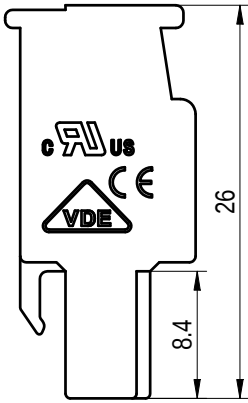

02P: Clasp on the left from this view

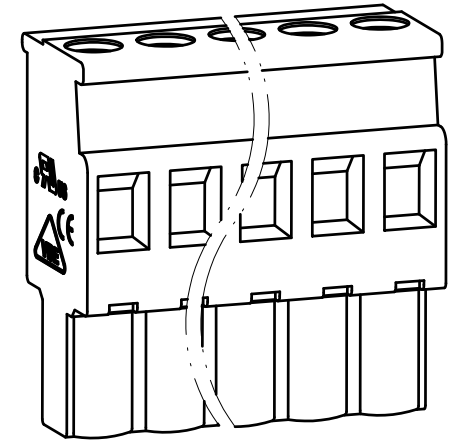

Note:

The A&Z(H) in the name means: A(H) and Z(H).

5	Cover	PA66	UL94V-0
4	Clamp	Copper alloy	Ni Plated
3	Cage	Copper alloy	M2.5/Ni Plated
2	Housing	PA66	UL94V-0
1	Screw	Steel	M2.5/Zn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/10	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28~12 / 1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

		MATERIAL:		SURFACE/COLOR:			
		MAT NO. /REV:		/ 00		MAT STATUS: 批量	
APPD: 兰春华		2022. 11. 03		NAME			
CHKD: 龚耀志		2022. 11. 03		2EDGKB-5. 08-XXP-1Y-00A&Z (H)			
DRFT: 刘强		2022. 11. 03					
DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
200030423		CUSTOMER DRAWING		已发布		2: 1	1/1

00			刘强	2022.11.03
REV	ECN	DESCRIPTION	DRFT	DATE