


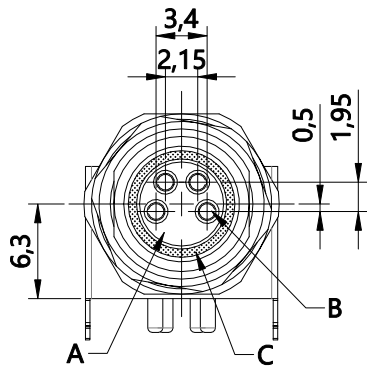



日期 Date	修改内容 Description	变更编号 ECN NO.
Oct.05,2012	First release	---
Feb.07,2021	Added some notes	---
May.17,2023	Added material description ⚠	---




Front view

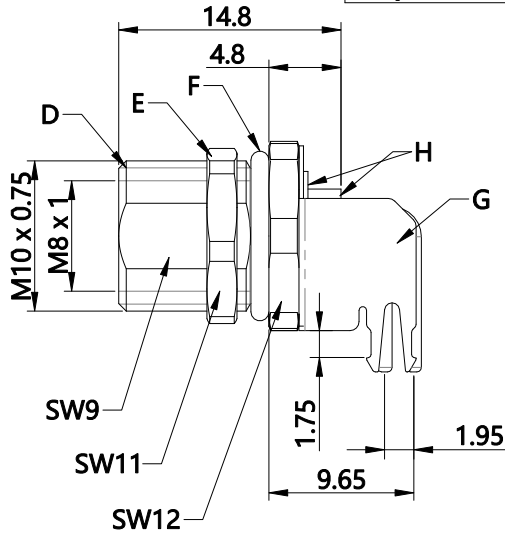

Note:
1.Temperature Range:-25℃~+90℃
2.Rating voltage:AC:50V / DC:60V
3.Rating current:3A
4.All materials are RoHS/REACH compliant

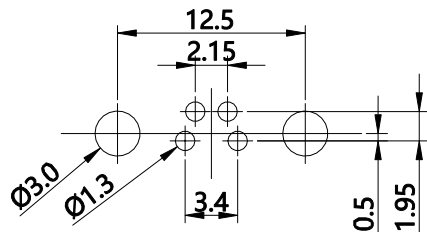

PCB layout
PCB thickness: 1.6mm

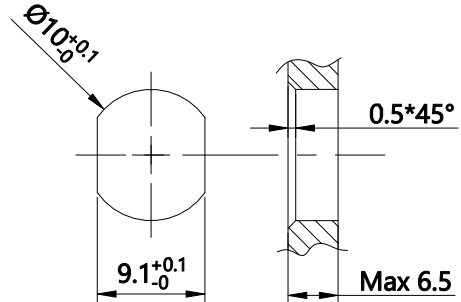

Recommended panel cut-out



H		Resin	Black epoxy resin	g	2
G		Shell	90° shielded shell , steel with tin plated	pcs	1
F		Ring	Black O_ring,FKM	pcs	1
E		Nut	M10*0.75 nut,H11*T2.0,brass with nickel plated	pcs	1
D		Screw	M8/M10 screw,brass with nickel plated	pcs	1
C		Ring	Orange O_ring,FKM	pcs	1
B		Ter.	M8 female terminal,brass with gold plated	pcs	4
A		Hous.	M8 4P black female housing,molded with PA66+GF	pcs	1
编号 No.	料号 Materials No.	品名 Name	材料规格 Description	单位 Unit	用量 Qty
文件路径 File Path			\\Eng\工程图纸		

FINEcables®							
图号 File No.	A000-CP-T0485		客户料号 Cus' P/N	MB08FBSAFF04RA		当前版本 Revision	A4
未注公差 No specified tolerance			核准 Approved	Johnson 2023/8/31	单位 Unit	mm	
线性 Linear	0.5~6	±0.1	审核 Checked	Hyman 2023/8/31	比例 Scale	--	
	>6~30	±0.2					
	>30	±2%					
角度 Angles	±3°		绘图 Drawing	Leo	页码 Page	1/1	

