



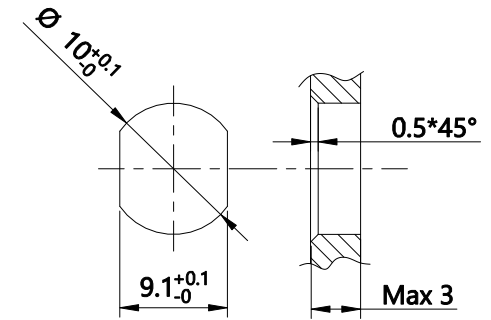


Note:"E" nut packed seperately $\triangle 4$




Front view

- $\triangle 4$ Note:
1.Temperature Range: -25℃~+90℃
2.Rating voltage: 30V AC/DC
3.Rating current: 3A
4.All materials are RoHS/REACH compliant

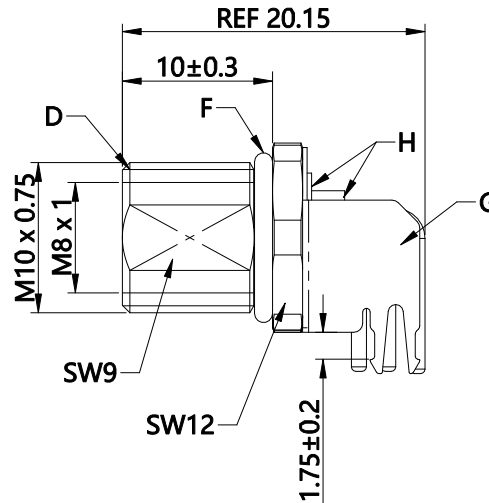


Recommended panel cut-out

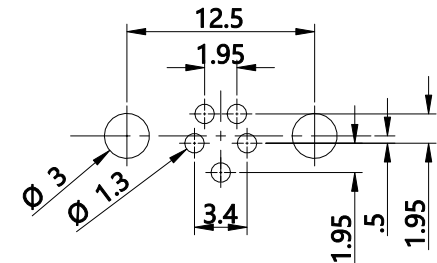

PCB layout(thickness: 1.6mm)

H		Resin	Black epoxy resin	g	2
G		Metal	Sheet metal, steel with tin plated	pcs	1
F		O_ring	Black O_ring	pcs	1
E		Nut	M10x0.75 nut, brass with nickel plated	pcs	1
D		Screw	Screw for M8 male housing, brass with nickel plated	pcs	1
C		O_ring	Orange O_ring	pcs	1
B		Terminal	M8 female terminal, brass with gold plated	pcs	5
A		Housing	M8 5P B-code black female housing	pcs	1
编号 No.	料号 Materials No.	品名 Name	材料规格 Description	单位 Unit	用量 Qty
文件路径 File Path		\\Eng\工程图纸			

日期 Date	修改内容 Description	变更编号 ECN NO.
Oct.05,2012	First release	---
Jul.15,2017	Updated the drawing	---
Jul.19,2022	Note:"E" nut packed seperately $\triangle 4$	---

							
图号 File No.	A000-CP-T0486		客户料号 Cus' P/N	MB08FBSBFF05RA		当前版本 Revision	A4
未注公差 No specified tolerance			核准 Approved	<i>Johnson</i> 2022/7/20	单位 Unit	mm	
线性 Linear	0.5~6	±0.1	审核 Checked	<i>Marya</i> 2022/7/20	比例 Scale	--	
	>6~30	±0.2					
	>30	±2%					
角度 Angles	±3°		绘图 Drawing	Holdyn	页码 Page	1/1	

