

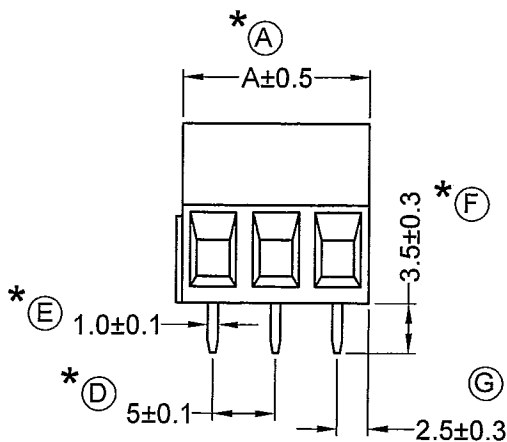
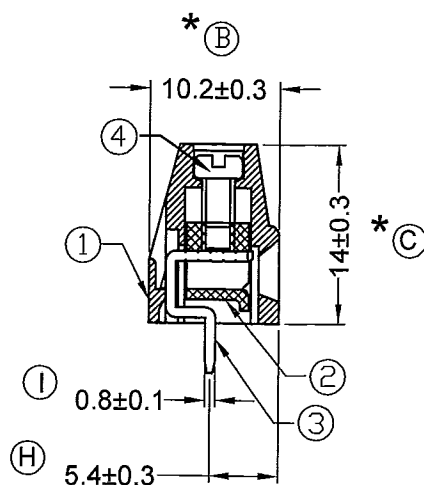



Type No: MB310-500
Order No: MB310-500MXX

RoHS
Compliant



PCB Layout



Pitch : 5.00mm(0.197inch)

Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	10.00	0.394	15	75.00	2.953
3	15.00	0.591	16	80.00	3.150
4	20.00	0.787	17	85.00	3.346
5	25.00	0.984	18	90.00	3.543
6	30.00	1.181	19	95.00	3.740
7	35.00	1.378	20	100.00	3.937
8	40.00	1.575	21	105.00	4.134
9	45.00	1.772	22	110.00	4.331
10	50.00	1.969	23	115.00	4.528
11	55.00	2.165	24	120.00	4.724
12	60.00	2.362	25	125.00	4.921
13	65.00	2.559			
14	70.00	2.756			

Current rating : 16Amp AC300V

Insulation withstands volt : AC2000V min

Insulation resistance : >2000MΩ DC500V

Operation temperature : -40°C to +105°C

Wire strip length : 4mm~5mm

Wire range : 12~26 AWG

Screw torque : 7.0 lb-inch

文件管制

OCT 19, 2012

文管中心

CONFIRMED & ACCEPTED BY

	Material	Plating/Finish	Remark
1	Insulating body Polyamide 66(UL94V-0)		Green
2	Cage clamp Steel	Ni plated	
3	Terminal Brass	Tin plated	
4	Screw Steel	Ni plated	

DECA
SwitchLab

Switchlab INC.

ORDER NO.	MB310-500MXX	VERSION	D	CONFIRMED BY	Verizon
SHEET OF	2/2	METRIC	MM	DRAWN BY	Wilson
				DATE	2012/10/19
				GENERAL MANAGER	Fuller

單據編號 : QR-0703-08

版次 : A版