







MB422-500MA ☐ ☐ Z

RoHS
Compliant

CALUS

☐ ☐ : Poles
500 : Pitch 5.00mm
422 : Standard
MB : Type


PCB Layout

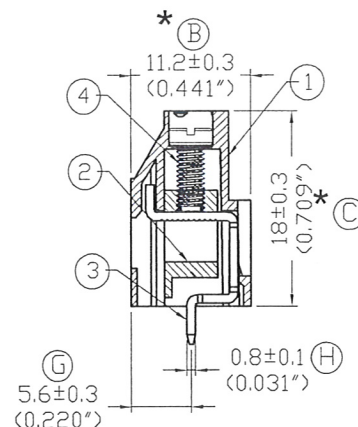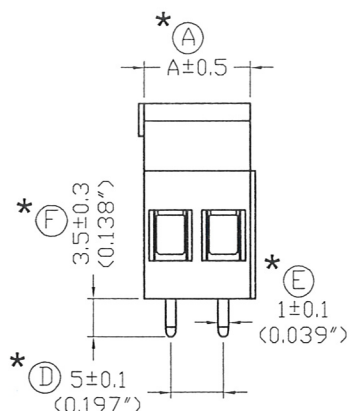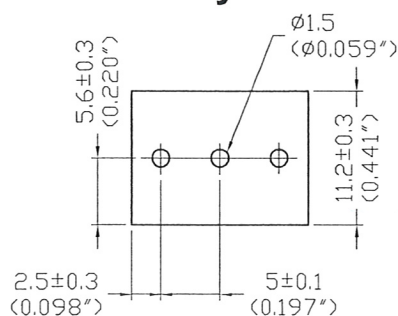

Pitch : 5.00mm(0.197inch)					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	10.00	0.394	15		
3	15.00	0.591	16		
4	20.00	0.787	17		
5	25.00	0.984	18		
6	30.00	1.181	19		
7	35.00	1.378	20		
8	40.00	1.575	21		
9	45.00	1.772	22		
10	50.00	1.969	23		
11	55.00	2.165	24		
12	60.00	2.362	25		
13	65.00	2.559			
14	70.00	2.756			

Current rating : 27Amp AC300V
Insulation withstands volt : AC2000V min
Insulation resistance : >2000MΩ DC500V
Operation temperature : -40°C to +105°C
Wire strip length : 7mm
Wire range : 12~24 AWG
Screw torque : 5.0 lb-inch

CONFIRMED & ACCEPTED BY



DECA SwitchLab INC.

	Material	Plating/Finish	Remark
1	Insulating body	Polyamide 66(UL94V-0)	Green
2	Cage clamp	Brass	Ni plated
3	Terminal	Brass	Tin plated
4	Screw	Steel	Zinc plated

PART NO.	MB422-500MAxxZ	VERSION	C	CONFIRMED BY	Widomh
SHEET OF	2/2	METRIC	MM	DRAWN BY	Heiangth
				DATE	2011/02/22
				GENERAL MANAGER	J-L H

單據編號 : QR-0703-08 版次 : A 版