

2.54mm PIN HEADER SINGLE ROW 180° DIP TYPE

SPECIFICATIONS:

Material:

- 1.Housing:PA10T Halogen free,UL94V-0
- Color:Black
- 2.Contacts:Brass
- Plating:Gold plated on contact end
- Tin plated on solder end

Electrical:





- Current rating:3A
- Dielectric withstand voltage:600V AC/minute
- Insulation resistance::1000 MΩ Min.
- Contact resistance:20mΩ Max.
- Operating remperature:-40℃ ~ +105℃

Order Information

R 1120 xx GT S 060 A S 110
1 2 3 4 5 6 7 8 9

- 1.RoHS
- 2.Series No.
- 3.Pin No.
- 4.Selective gold plated
- 5.Right angle
- 6.Top end length
- 7.Color
- 8.Single stack
- 9.Total length

Contacts	A	B	Contacts	A	B
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60
21	50.80	53.34			

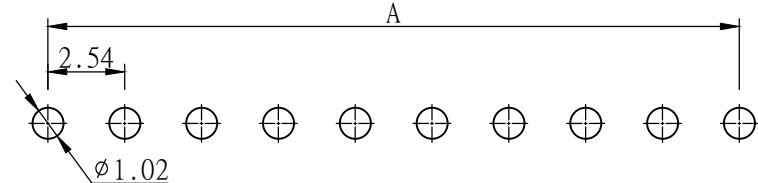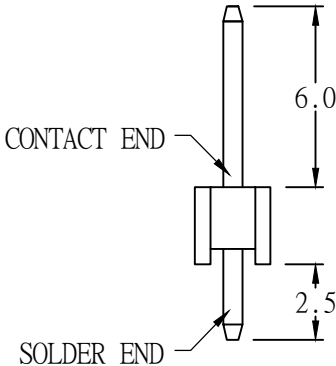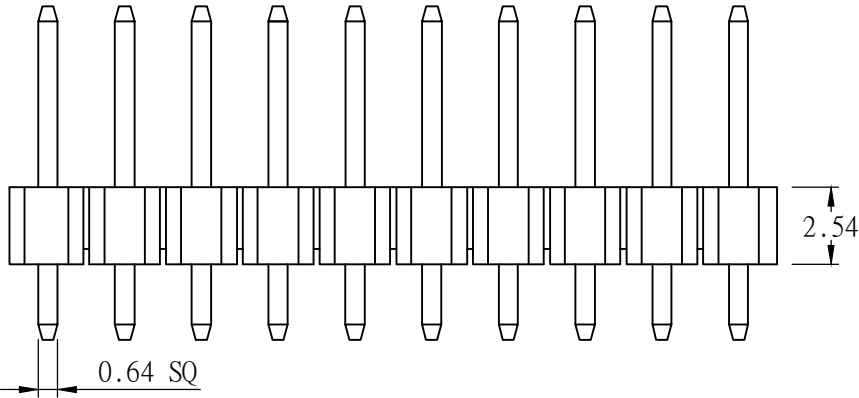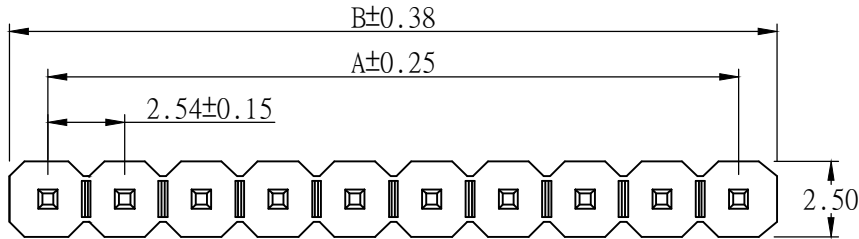

RECOMMENDED P.C.B LAYOUT

	THIRD ANGLE PROJECTION
GENERAL TOLERANCES (UNLESS SPECIFIED)	
.X	±0.25
.XX	±0.15
.XXX	±0.10

NAME		DATE	UNIT	mm
DRAW	RALF	2024/04/22	SCALE	4:1
CHECK	SELINA	2024/04/22	SIZE	A4
APPROVED	JASON	2024/04/22	SHEET	1 OF 1

		T-TECH ENTERPRISE LTD.	
PART NO.	R1120xxGTS060AS110		

REV.	DESCRIPTION	DATE	BY	APPROVED
A0	New release	2024/04/22	RALF	JASON