

SR1020CT THUR SR1060CT

SCHOTTKY BARRIER RECTIFIERS

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

MECHANICAL DATA

Case : JEDEC TO-220AB molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

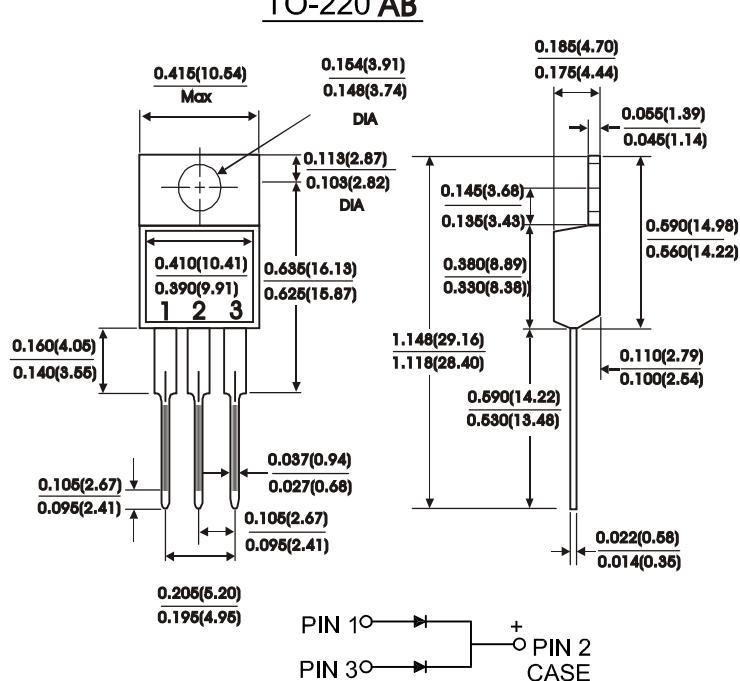

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

| Characteristic | Symbol | SR 1020CT | SR 1030CT | SR 1035CT | SR 1040CT | SR 1045CT | SR 1050CT | SR 1060CT | Units |
|---|---|----------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|
| Maximum recurrent peak reverse voltage | V _{RRM} | 20 | 30 | 35 | 40 | 45 | 50 | 60 | Volts |
| Maximum RMS voltage | V _{RMS} | 14 | 21 | 25 | 28 | 32 | 35 | 42 | Volts |
| Maximum DC blocking voltage | V _{DC} | 20 | 30 | 35 | 40 | 45 | 50 | 60 | Volts |
| Maximum average forward rectified current at T _c = 125 °C | I _(AV) | | | | | 10 | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg) | I _{FSM} | | | | | 120 | | | Amps |
| Maximum instantaneous forward voltage (Per leg)(NOTE 2) | I _F = 5.0A | V _F | | | 0.65 | | 0.75 | | Volts |
| Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2) | T _c = 25 °C T _c = 125 °C | I _R | | | 0.5 | 50.0 | | | mA |
| Typical thermal resistance (Per leg)(NOTE 1) | R _{th} -JC | | | | 3.0 | | | | °C/W |
| Operating temperature range | T _J | | | | -65 to +150 | | | | °C |
| Storage temperature range | T _{Stg} | | | | -65 to +175 | | | | °C |

NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

(3) Marking : SR1020CT = SR1020 (Without Marking "CT")
Symbol Marking

RATINGS AND CHARACTERISTIC CURVES SR1020CT THRU SR1060CT

