





2.54 (0.100") DIP PLUG CONNECTOR

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
NEW		05.10.30	

SPECIFICATIONS

Current Rating: 3 AMP
 Voltage Rating: 500V AC/DC
 Withstand Voltage: 1000V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF (UL94V-0)

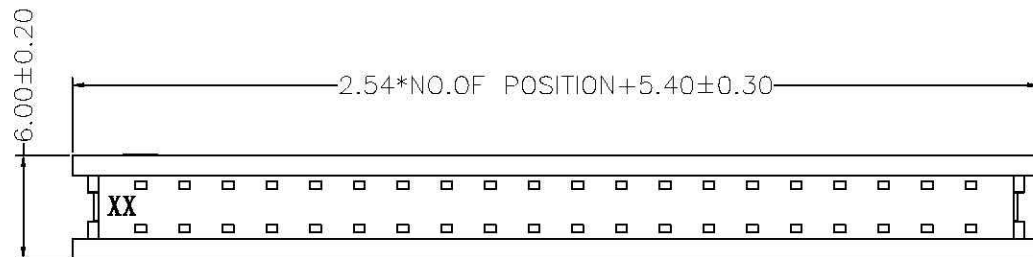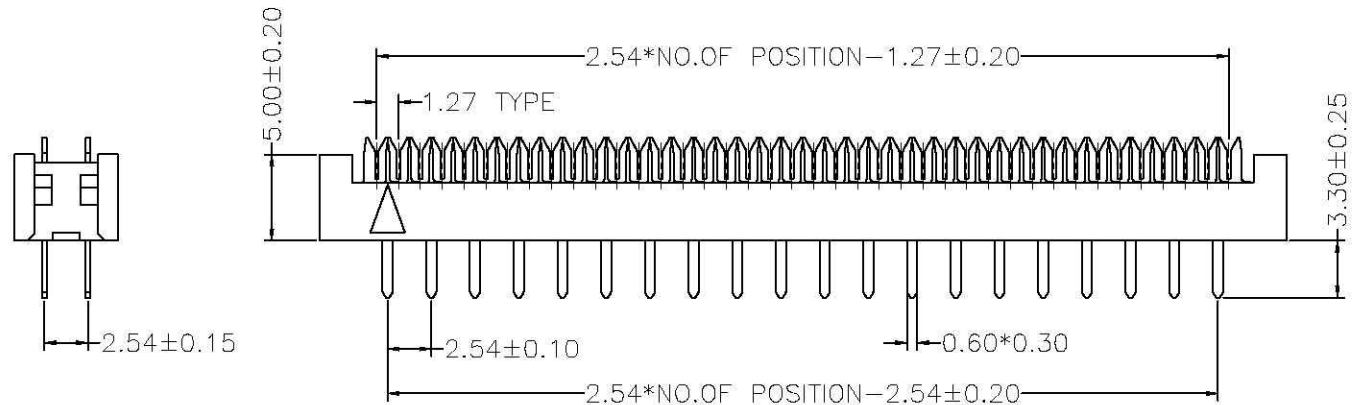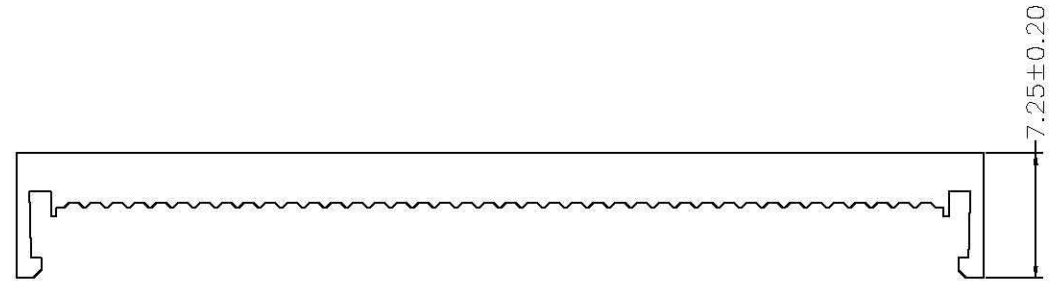

Ordering Information

5310- XX B XX X01

No.of Pins	Contact Plating:
10P 60P	G0=Gold Flash
12P 62P	G1=3u"Gold
14P 64P	G2=5u"Gold
16P 68P	G3=10u"Gold
18P	G4=15u"Gold
20P	G5=30u"Gold
22P	S0=Gold Flash/Tin
24P	S1=3u"Gold/Tin
26P	S2=5u"Gold/Tin
30P	S3=10u"Gold/Tin
34P	S4=15u"Gold/Tin
36P	S5=30u"Gold/Tin
40P	SN=Tin
44P	
50P	

CONSEN ELECTRIC CO., LTD
 WWW.CNS-CHINA.COM

公差 (TOLERANCE)		绘图 (DRAWN)	韦翔丹	投影 (PROJECT)	料号 (PART NO)	5310-XXBXXX01	发行编号 (Issue No)	WF-
X.	±5°							
.X	±2°	.X		2:1	图号 (DRAW NO)	WF5310-2A001	页次 (PAGE)	1/1
.XX	±1°	.XX		版本 (EDITION)	品名 (NAME)	2.54 DIP PLUG CONNECTOR		
.XXX	±0.5°	.XXX		日期 (DATE)				