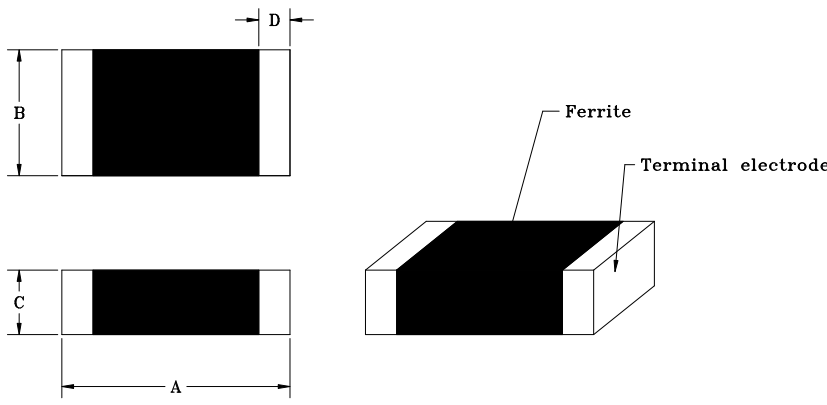


SPECIFICATION FOR APPROVAL

COMMODITY	CHIP BEAD	SPEC NO.	SP-N251014006
ITEM	JCB 201209-222	Green	版本：A 表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	2.00	±0.20
	B	1.20	±0.20
	C	0.90	±0.20
	D	0.50	±0.30

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	2200 ± 25% Ω	☒ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100 MHz	☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer.
RDC	0.5 (max) Ω	☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter
IDC	200 (max) mA	☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter
		☐ WAYNE KERR HI-POT TESTER 7600


REMARK :

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-N251014006

Typical Impedance v.s. Frequency Curve

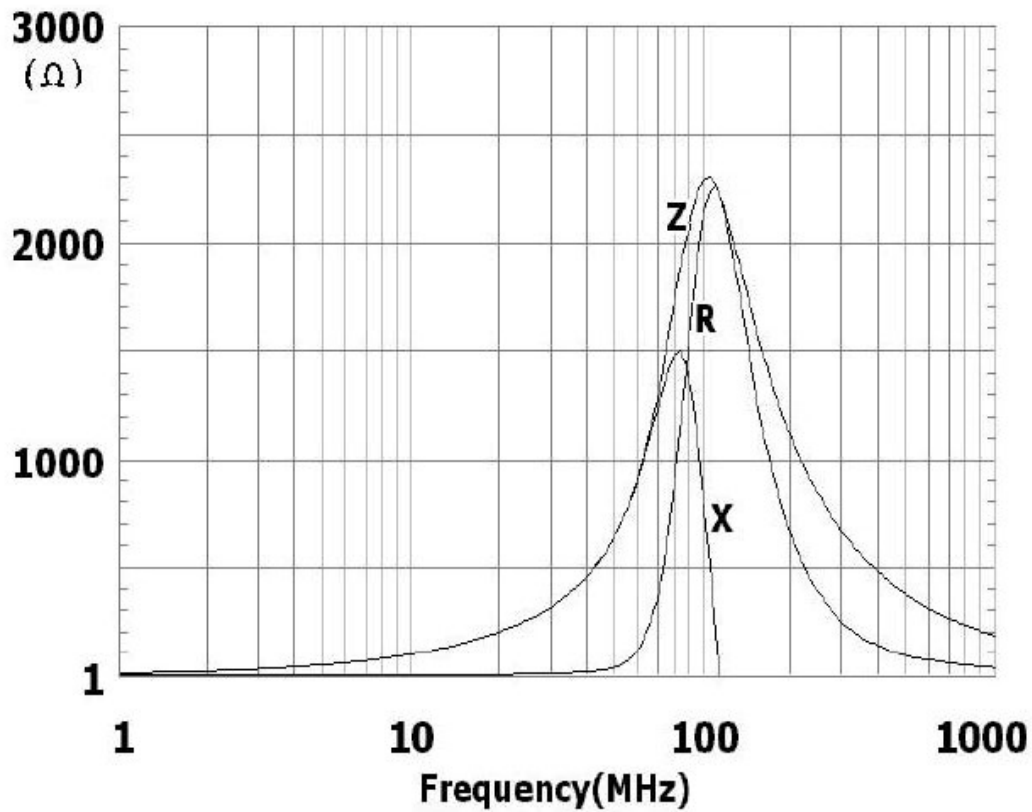

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

