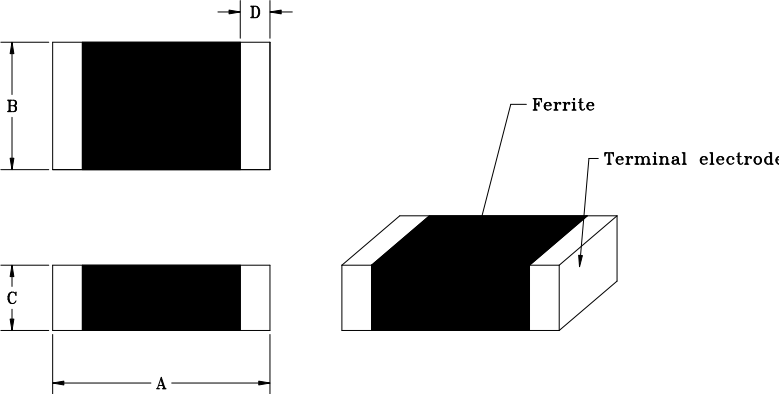


SPECIFICATION FOR APPROVAL

COMMODITY	CHIP BEAD	SPEC NO.	SP-N251003007
ITEM	JCB 321611A-121/3 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.2	±0.2
	B	1.6	±0.2
	C	1.1	±0.2
	D	0.5	±0.3

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	120 ± 25% Ω	☒ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	100 MHz	☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R.
RDC	0.08 (max) Ω	☒ HP-4286A RF L.C.R. Meter.
IDC	3000 (max) mA	☒ CHROMA 3302 Automatic Components Analyzer.
		☐ WAYNE KERR 6420 Precision Impedance Analyzer.
		☒ ZENTECH 1320 BIAS CURRENT.
		☒ BK PRECISION 2840 DC Resistance Meter
		☒ ZENTECH 502AC Resistance Merter
		☐ ADEX AX-1155B DC Low Ohm Meter
		☐ WAYNE KERR HI-POT TESTER 7600


REMARK :

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-N251003007

Typical Impedance v.s. Frequency Curve

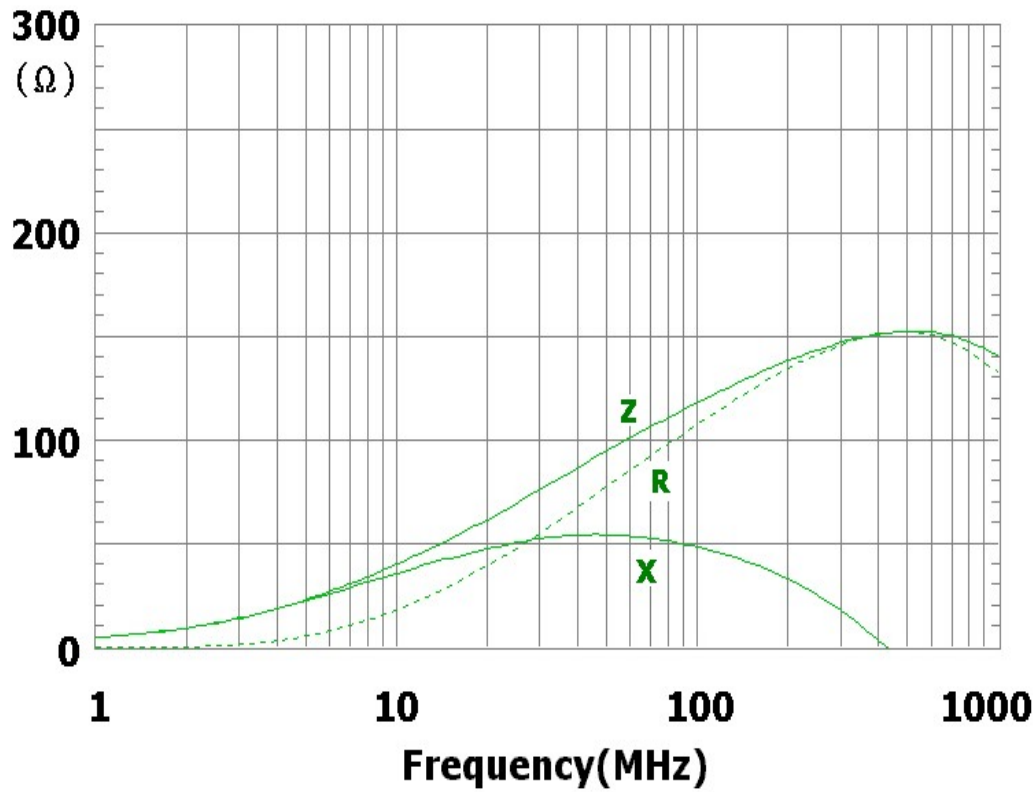

Test Instrument :

Agilent 4287A RF LCR Meter

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw