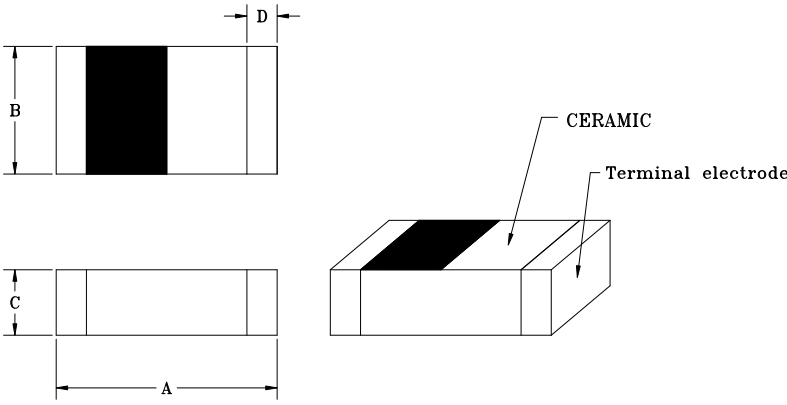


ECN HISTORY LIST

[illegible]

SPECIFICATION FOR APPROVAL

COMMODITY	HIGH-FREQUENCY MULTILAYER CHIP INDUCTOR	SPEC NO.	SP-060927251
ITEM	JCI 1608C-68NJ Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.6	±0.2
	B	0.8	±0.2
	C	0.8	±0.2
	D	0.3	±0.2

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	68 ± 5%	nH	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
Q	12	(min)	
TEST FREQUENCY	100	MHz	
TEST VOLT	0.25	V	
SRF	0.7	(min) GHz	
RDC	0.85	(max) Ω	
IDC	300	(max) mA	

REMARK :
OPERATING TEMP. RANGE : -55℃ ~ +125℃
STORAGE TEMP. RANGE : -40℃ ~ +85℃

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			