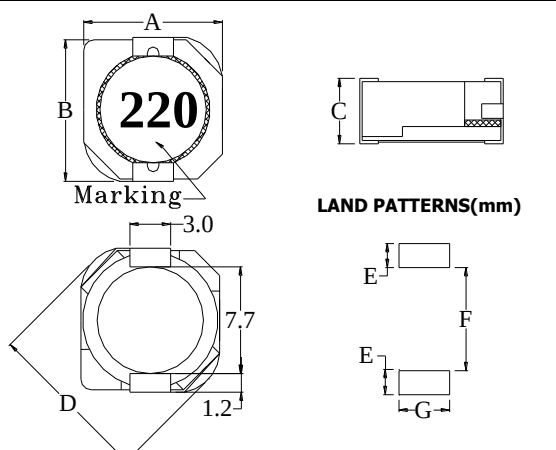


ECN HISTORY LIST

[illegible]

SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE	SPEC NO.	SP-060724170
ITEM	JPRD 1004-220M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	10.0	±0.3
	B	10.5	Max.
	C	3.8	±0.2
	D	13.5	Max.
	E	1.7	REF.
	F	7.3	REF.
	G	3.6	REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	22 ± 20%	μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	73.0 (max)	mΩ	
Isat	2.9 (max)	A	
Irms	3.3 (max)	A	

REMARK :

- Inductance drop = 35% typ at Isat.
- ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE	SPEC NO.	SP-060724170
ITEM	JPRD 1004-220M 	版本：A	表單編號：QR-012-02

(3) Material List

NO	ITEM	MATERIAL	NOTE
1	CORE	DR 9.7*3.65 & RI 10*3.3*8.2 Or other's equivalent	
2	WIRE	SFBW Or other's equivalent	155℃ CLASS
3	BASE	C1100 Or other's equivalent	
4	SOLDER	100H Or other's equivalent	
5	SOLDER	S240 Or other's equivalent	
6	INK	SMD-48C Or other's equivalent	Black
7	EPOXY	6020H-6-9(NH) / S-9001A-6B Or other's equivalent	Black

REMARK :

PURCHASER CONFIRMED :

APPROVED

CHECKED

DRAWN



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw