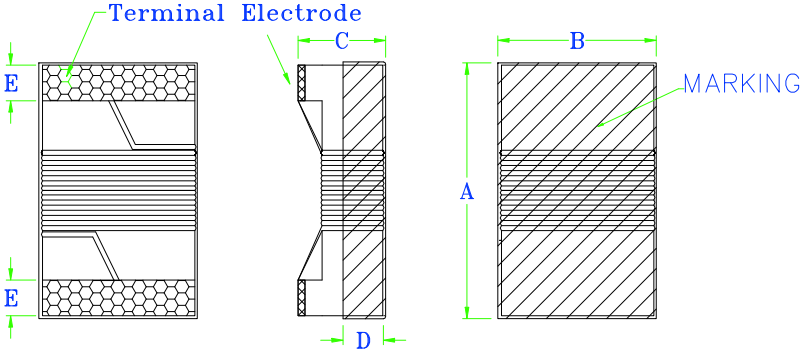


SPECIFICATION FOR APPROVAL

COMMODITY	HIGH FREQUENCY WOUND CHIP INDUCTOR	SPEC NO.	SP-060926040
ITEM	JWI 0402C-22NJ Green	版本：A	表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.00	±0.1
	B	0.55	±0.1
	C	0.50	±0.1
	D	0.50	(REF)
	E	0.20	±0.1
	F		
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	22 ± 5% nH	☐ AGILENT 4294A Precision Impedance Analyzer. ☒ AGILENT 4285A Precision L.C.R. Meter. ☒ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Meter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	250 MHz	
Q	25 (min)	
TEST FREQUENCY	250 MHz	
SRF	2800 (min) MHz	
RDC	0.3 (max) Ω	
IDC	400 (max) mA	

REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			