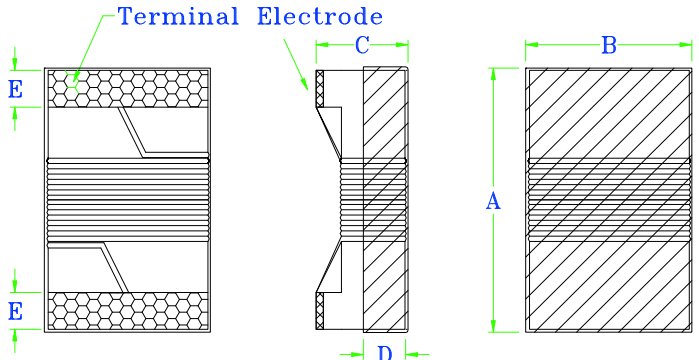


ECN HISTORY LIST

[illegible]

SPECIFICATION FOR APPROVAL

COMMODITY	HIGH FREQUENCY WOUND CHIP INDUCTOR	SPEC NO.	SP-060926062
ITEM	JWI 0603C-5N6J Green	版本：A	表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	1.60 ±0.2
		B	1.05 ±0.2
		C	1.05 ±0.2
		D	0.50 (REF)
		E	0.35 ±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	5.6 ± 5%	nH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	250	MHz	
Q	16	(min)	
TEST FREQUENCY	250	MHz	
SRF	5500	(min) MHz	
RDC	0.15	(max) Ω	
IDC	700	(max) mA	

REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			