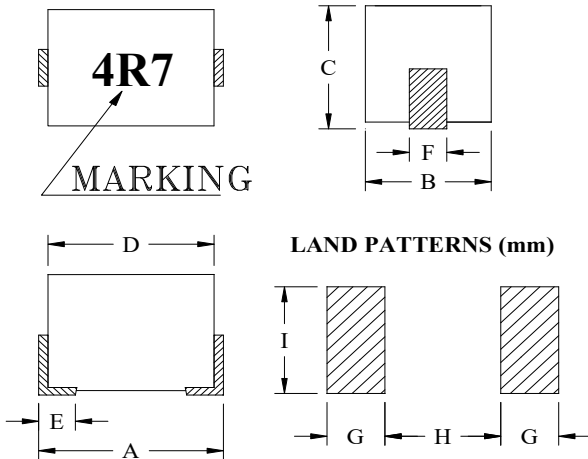


SPECIFICATION FOR APPROVAL

COMMODITY	WOUND CHIP INDUCTOR	SPEC NO.	SP-N250902017
ITEM	JWI 322522T-4R7J Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
 MARKING LAND PATTERNS (mm)		A	3.2	±0.3
		B	2.5	±0.2
		C	2.2	±0.2
		D	2.9	±0.2
		E	0.2	Min.
		F	1.9	±0.1
		G	1.2	Ref.
		H	2.0	Ref.
		I	2.0	Ref.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	4.7 ± 5%	μ H	☒ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
Q	30	(min)	
TEST FREQUENCY	7.96	MHz	
TEST VOLT	0.25	V	
SRF	50	(min) MHz	
RDC	1.50	(max) Ω	
IDC	220	(max) mA	

REMARK :

. Operating Temperature : -40~+85℃.

PURCHASER CONFIRMED :

APPROVED	CHECKED	DRAWN
		