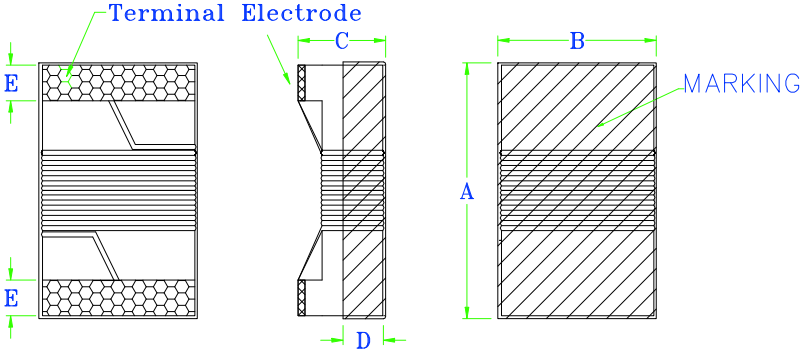


SPECIFICATION FOR APPROVAL

COMMODITY	HIGH FREQUENCY WOUND CHIP INDUCTOR	SPEC NO.	SP-060926017
ITEM	JWI 0402C-3N9S	Green	版本：A 表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	1.00 ±0.1
		B	0.55 ±0.1
		C	0.50 ±0.1
		D	0.50 (REF)
		E	0.20 ±0.1
		F	
		G	
		H	
		I	
		J	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	3.9 ± 0.3 nH	☐ AGILENT 4294A Precision Impedance Analyzer. ☒ AGILENT 4285A Precision L.C.R. Meter. ☒ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	250 MHz	
Q	20 (min)	
TEST FREQUENCY	250 MHz	
SRF	5800 (min) MHz	
RDC	0.066 (max) Ω	
IDC	840 (max) mA	

REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			