



厦门同创兴科电子科技有限公司
Xiamen Unicreed Electronics Co., Ltd.

承认书/Specification for approval

CUSTOMER/客户名称: Ivent Solution Limited

DESCRIPTION/产品类型: Encapsulated Transformer

CUSTOMER No./客户编号:

PRODUCT No./产品编号: UC30S-2-18020

Approved by customer/客户承认回签

Friendly Reminder: Please help to sign this Spec when approve , and fax to our company .

Or else, we will consider you have accepted it and make future order based on this Spec.

友情提示:确认后请签字,按封面的传真号码回传给厦门同创兴科电子科技有限公司.如无回传,则视为默认,后续的相关订单将以按本承认书的规定为技术要求.

MARKING 修改标记	REVISED CONTENT 修改内容	APPROVED & DATE 批准 日期

DATE/日期	2026/1/28	EDITION/版本	A	PAGE/页码	1 OF 3
DRAFT/拟制	黄文福	CHECK/审核	温玉冬	APPROVAL/批准	温玉冬

厦门同创兴科电子科技有限公司/Xiamen Unicreed Electronics Co., Ltd

厦门市海沧区新阳工业区阳和南路6号, 2号厂房402单元 Zip: 361026




The 402 Unit, 2# Industry Building, No.6 Yanghe South Road, Xinyang Industrial park, Haicang District, Xiamen, China

电话(TEL):+86 592 6530699


传真(FAX):+86 592 6530698

Outline Drawing/外观图

1. Physical Dimension (UNIT: mm) /外形尺寸 (单位: 毫米)

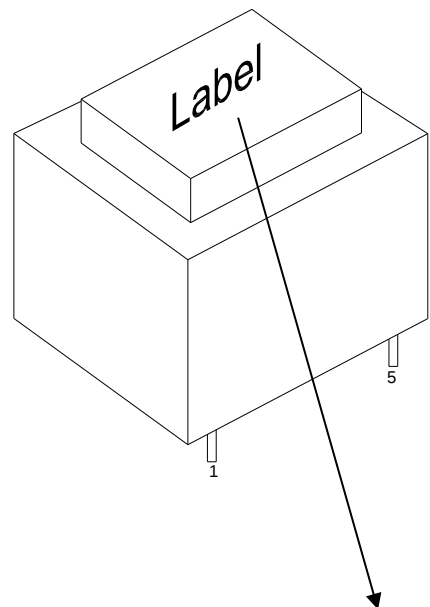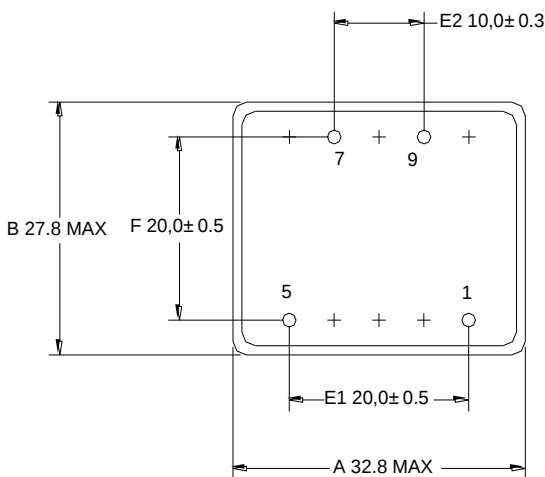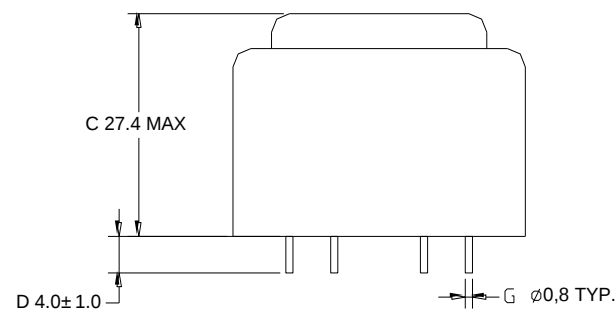


1. 整体外观整洁, 无机械损伤;
2. 标签如右侧所示;

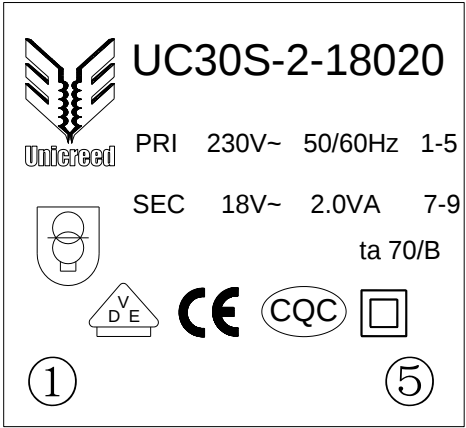

ORIG. DATE/初始日期	2026/1/28	EDITION/版本	A
PRODUCT NO. /产品编号	UC30S-2-18020	PAGE/页码	2 OF 3

Electrical Performance/电气性能

2、ELECTRICAL SCHEMATIC/电气原理图:

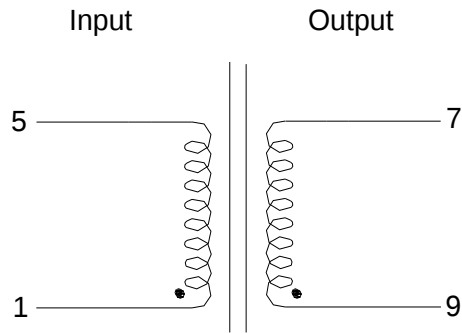

3、ELECTRICAL PERFORMANCE/电气性能:

ITEM(项目)	端子 TERMIANL	规格值 SPECIFICATION	测试条件 TEST CONDITION	测试仪器 TEST INSTRUMENTS	备注 REMARK
EXCITATION CURRENT 空载电流(mA)	1--5	15 MAX	Input: (1--5) 230V/ 50Hz	GDW 4033A OR EQU.	
LOSS POWER 空载损耗(W)	1--5	1 MAX			
Load Voltage 负载电压(VAC)	7--9	18±10% @ 111mA			
No-Load Voltage 空载电压(VAC)	7--9	30.8 MAX			
RESISTANCE 直流电阻(Ω)	1--5	3150 MAX	Ta=25° C	TH2512B OR EQU.	
	7--9	78 MAX			
INSULATION RESISTANCE 绝缘阻抗	P--S	100MΩ MIN	DC500V	CS5603 OR EQU.	
HI-POT 耐压	P--S	3750V 1mA 60s /4200V 1mA 1s	50Hz		

4、TEMPERATURE RISE TEST/温升测试: (Ta=25℃ INPUT 230V 50Hz)

PRI & SEC WINDING' S TEMPERATURE RISE 45℃ MAX. AT RATED LOAD. (RESISTANCE METHOD)

在周围环境温度25℃，额定负载时，用电阻法测得初级绕组温升为45℃最大

5、OPERATING TEMPERATURE/工作温度:-25℃ to 70℃

STORAGE TEMPERATURE/储存温度:-25℃ to 85℃

6、SAFETY STANDARD/安全标准: EN61558

7、SUGGESTION:IN THE WHOLE SET PRONDUCT,THE PRIMARY OR SECONDARY CIRCUITS SHALL BE IN SERIES WITH CURRENT FUSE.

建议：在整机中，初级或次级电路需串联电流保险管.

7、NET WEIGHT/产品重量: 100g/PCS

DATE/初始日期	2026/1/28	EDITION/版本	A
PRODUCT NO./产品编号	UC30S-2-18020	PAGE/页码	3 OF 3