

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2020.11.17	钟建虾








Specifications
 Current Rating:2Amp
 Voltage Rating:100V AC/DC
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:800VAC
 Contact Resistance:20mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 PA9T(Nylon) or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

CIRCUITS	DIM A	DIM B	CIRCUITS	DIM A	DIM B
02	2.00	8.00	10	18.00	24.00
03	4.00	10.00	11	20.00	26.00
04	6.00	12.00	12	22.00	28.00
05	8.00	14.00	13	24.00	30.00
06	10.00	16.00	14	26.00	32.00
07	12.00	18.00	15	28.00	34.00
08	14.00	20.00	16	30.00	36.00
09	16.00	22.00			

Ordering Information

G WFC108 - XX XX A 001 D X B X-9B

No. of Pins per Row 02~16 Standard Plating 22=Matte Tin Selective Plating 01=Tin 02=Gold Flash Color 5=Beige Standard Packing A=box Selective Packing D=Tape&Reel F=Tape&Reel+CAP

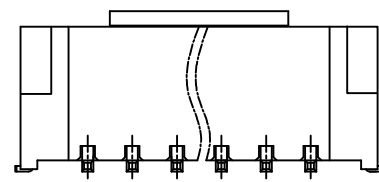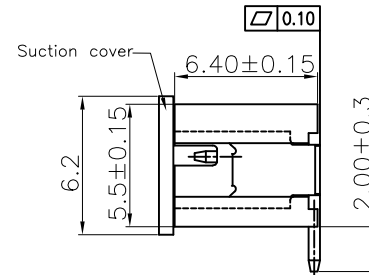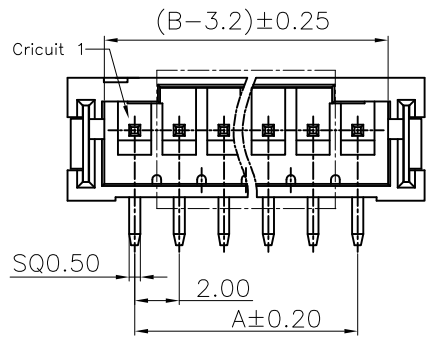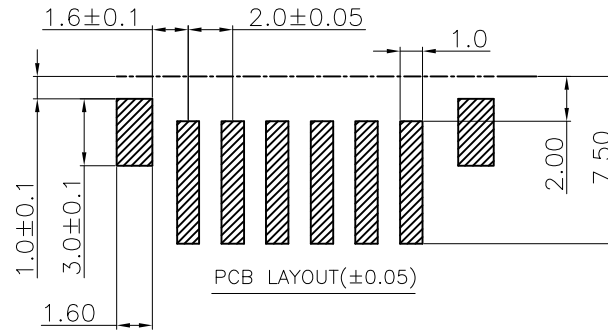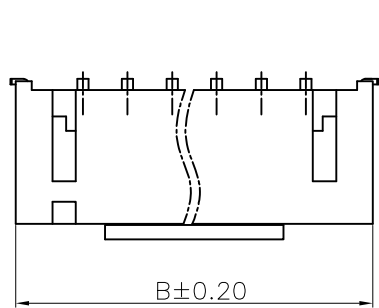

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±/
.X.*±3.0°	.X±0.25
.XX.*±2.0°	.XX±0.20
.XXX.*±1.0°	.XXX±0.10

DESIGNED: 钟建虾 DATE: 2020.11.17
 CHECKED: 李全燊 DATE: 2020.11.17
 APPROVED: 方秋香 DATE: 2020.11.17

DWG. NO. GWFC108-CA1DB
 PART NO. GWFC108-XXXXA001DXBX-9B

TITLE. 2.0mm pitch 180° wafer