

0101 KSS WIRING DUCT (SLOTTED)



- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.


※ The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example,

Item no. : VD-8→VQ-8, KVD-8→KVQ-8, HVD-8→HVQ-8


Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.




HVD SLOT : 4mm

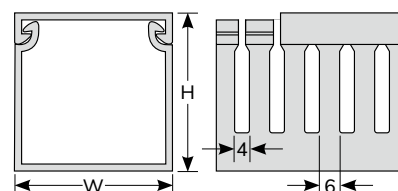

KVD SLOT : 6mm

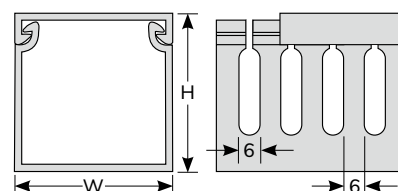

VD SLOT : 8mm

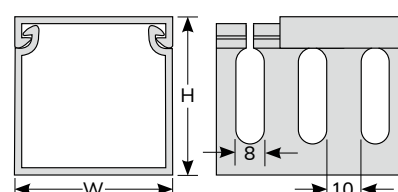

Item No.			W x H	Length
SLOT				
8mm	6mm	4mm	mm	
VD-1		HVD-1	25 X 30	2M
VD-1.5		HVD-1.5	30 X 30	
VD-2		HVD-2	25 X 40	
VD-3		HVD-3	33 X 40	
VD-4	KVD-4	HVD-4	40 X 40	
VD-5		HVD-5	60 X 40	
VD-5.5		HVD-5.5	80 X 40	
VD-5.7		HVD-5.7	100 X 40	
VD-6		HVD-6	25 X 60	
VD-7	KVD-7	HVD-7	40 X 60	
VD-8	KVD-8	HVD-8	60 X 60	
VD-9		HVD-9	80 X 60	
VD-9.5		HVD-9.5	100 X 60	
VD-9.6		HVD-9.6	120 X 60	
VD-9.65		HVD-9.65	120 X 65	
VD-9.66		HVD-9.66	25 X 80	
VD-9.7		HVD-9.7	40 X 80	
VD-9.8		HVD-9.8	60 X 80	
VD-10		HVD-10	80 X 80	
VD-10.5		HVD-10.5	100 X 80	
VD-11		HVD-11	120 X 80	
VD-12		HVD-12	40 X 100	
VD-13		HVD-13	60 X 100	
VD-14		HVD-14	80 X 100	
NEW VD-16			120X 100	

0101A KSS WIRING DUCT CUTTER

Item No : WT-1



Blade length : 62mm

Item No : WT-2



Blade length : 77mm

