

F

E

D

C

B

A

F

E

D


C

B



A

123456789

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.07.14	許承佑
02	02	變更端子材質及新增CAP 配方	2010.07.22	張春進
03	03	變更圖號	2011.02.25	蒙華明
04	04	????CAP??	2013.11.05	邱明周

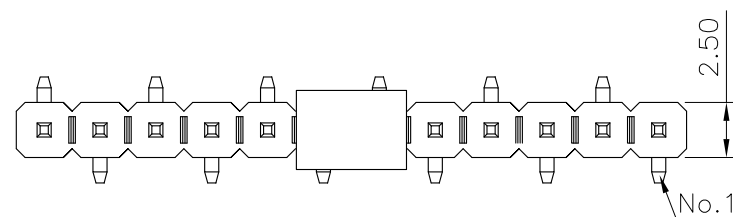


Dim.D	NOTE
5.00mm	02pins
6.50mm	03~40pins

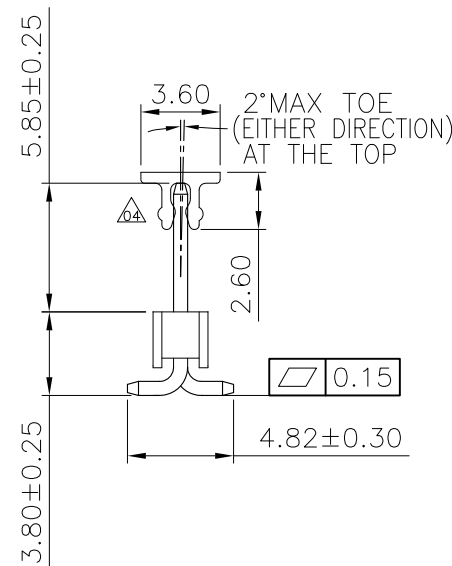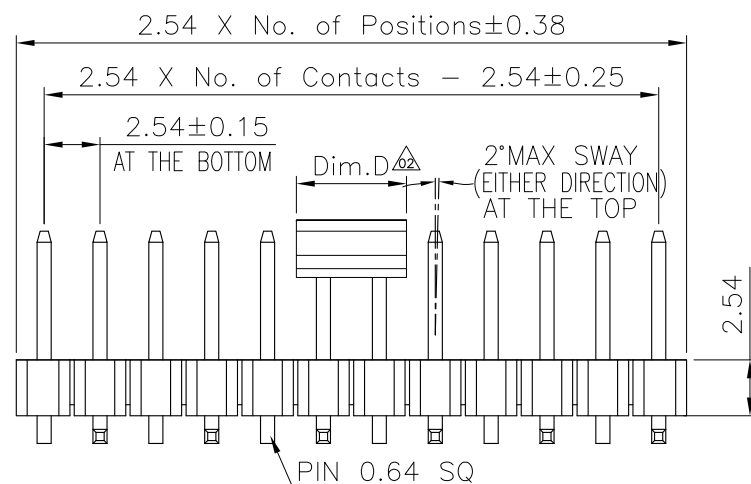

Specifications
Current Rating:3.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet Greenconn requirement for environment protection.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

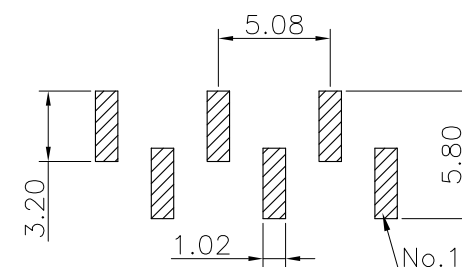

Ordering Information

G PHC101 - XX XX A 049 C 1 B X

No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
E=CAP+Tube
F=CAP+Tape&Reel

38=10U" gold on contact area/matte tin on other area

格稜股份有限公司
Greenconn Corporation

格 稜 股 份 有 限 公 司 Greenconn Corporation					GENERAL TOLERANCE		DESIGN: 邱明周	DATE: 2013.11.05	DWG. NO.  GPHC101-CA49CB	TITLE. 2.54 PIN HEADER SINGLE ROW SMT TYPE CONNECTOR
					X.*±5.0°	X.±0.30	CHECKED: 劉北平	DATE: 2013.11.05		
					.X*±3.0°	.X±0.25	AUDITED: 李 輝	DATE: 2013.11.05	PART NO. GPHC101-XXXX A049C1BX	
					.XX*±2.0°	.XX±0.15	APPROVED: cc_li	DATE: 2013.11.05		
REV. 04	UNIT. mm	SCALE. 3:1	PAGE. 1/1		.XXX*±1.0°	.XXX±0.10				

123456789