


Note:

- 1.All materials verified & comply with ROHS;
- 2.All products FAI trial qualified: crimping@pull force or socket@insert and withdrawal;
- 3.All products 100% E-testing by gold-sample verify;
- 4.E-testing conditions: on-resistance $\leq 3.0\Omega$, insulation resistance $\geq 10M\Omega$, /DC 300V 10mS;
- 5.All products 100% visual inspect as outgoing;

REVISION	CHANGES	APPROVED	DATE
S1	NEW DRAWN	JH	2026-09-08

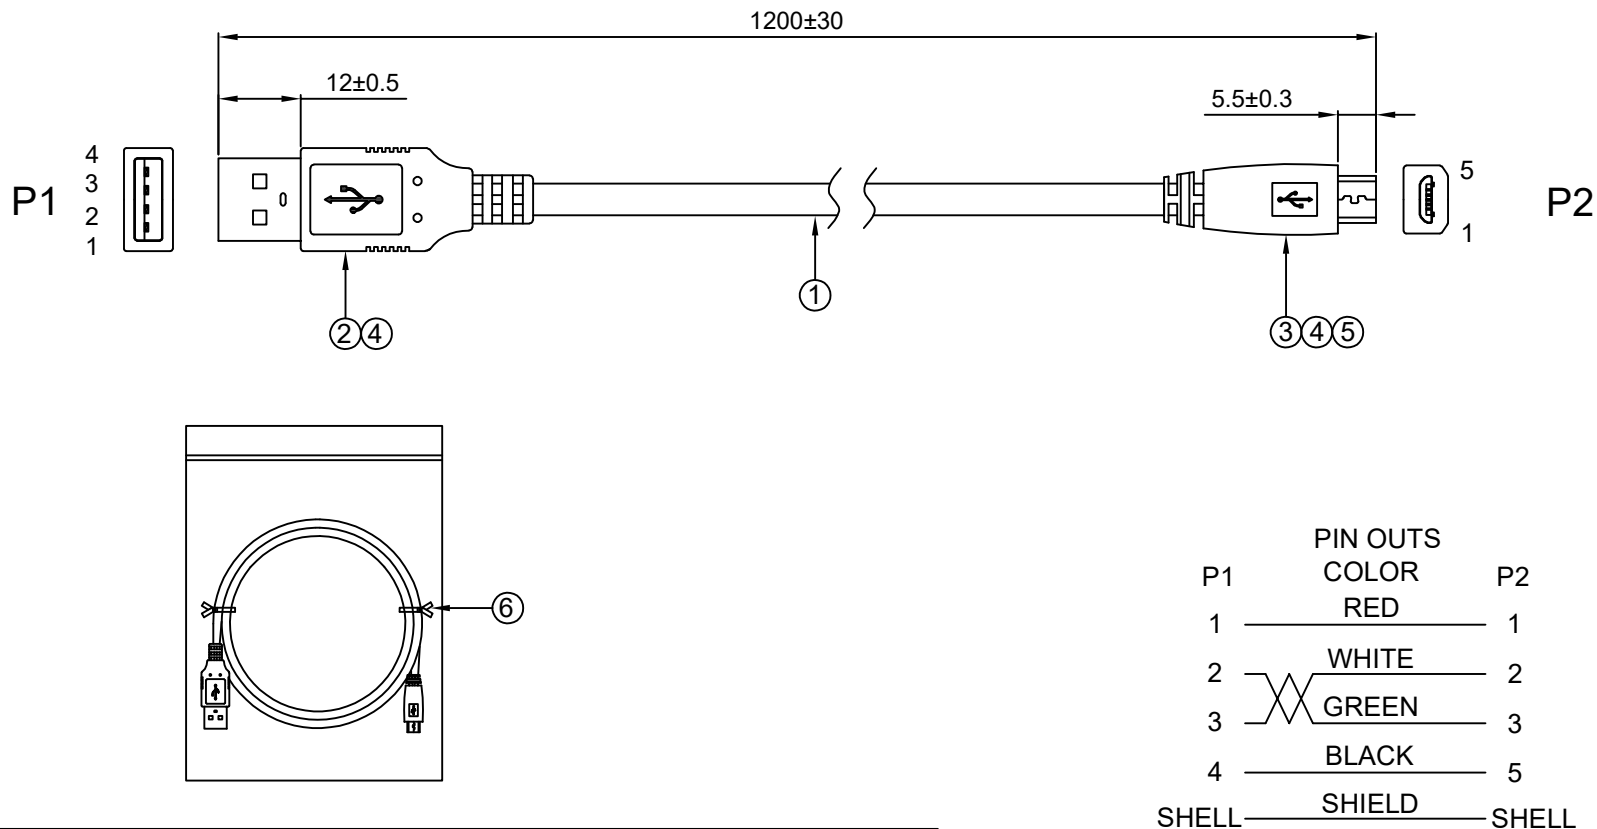

B O M

NO.	PART NAME	SPECIFICATION	Q'TY	REMARK
⑥	MIN TIE	BLACK	2PCS	
⑤	H.S.TUBE	1.0*5MM BLACK	1PCS	
④	PVC	PVC 80P BLACK	2PCS	
③	CONNECTOR	MICRO USB B TYPE MALE GOLD PLATING,BLACK INSULATOR	1PCS	
②	CONNECTOR	USB A TYPE MALE GOLD PLATING,WHITE INSULATOR	1PCS	
①	CABLE	USB2.0 CABLE 28AWG*1P+28AWG*2C+AEB OD4.2MM BLACK,NOT MARKED	1PCS	

ACE SHENZHEN DIMU ELECTRONICS CO.,LTD.		CUSTOMER CODE	079
www.aceharness.com		CUSTOMER PN.	
REF tolerance(mm)		APPROVED:	
0~5:±1.0	200~500:±10	REVIEW:	
5~20:±2.0	500~1000:±15	CHECKED: David 20260908	
20~50:±3.0	1000~2000:±20	DRAWN: JH 20260908	
50~200:±5.0		Drawing No.: ACE14079681	
		SCALE:None	PAGE:1/1
		UNIT: MM	REVISION:S1