
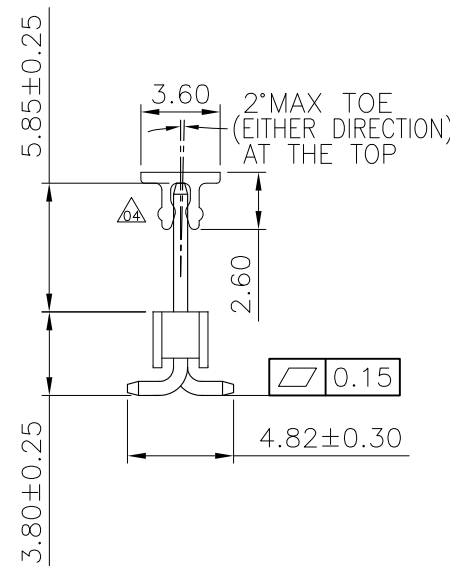
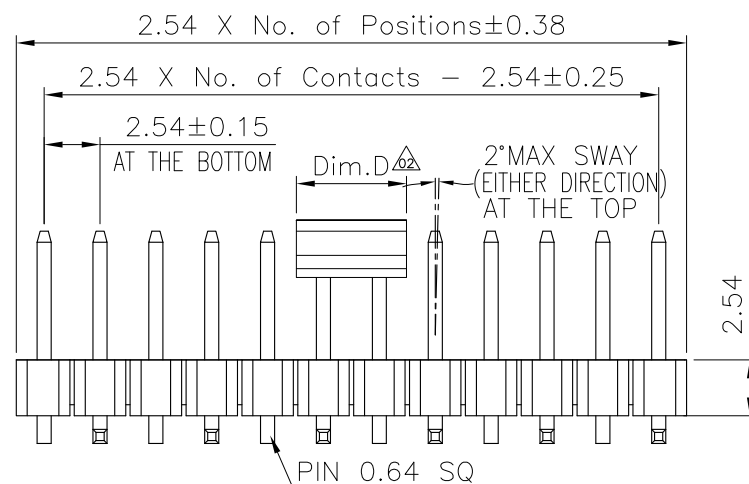
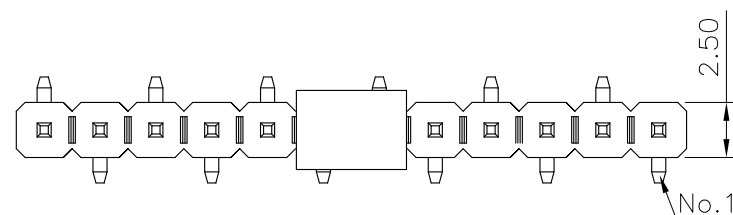
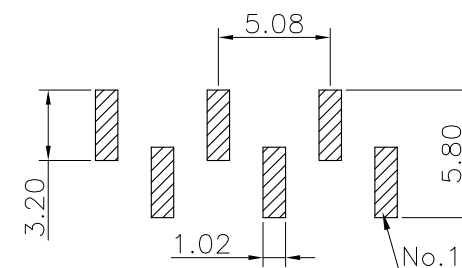


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.07.14	許承佑
02		變更端子材質及新增CAP 配方	2010.07.22	張春進
03		變更圖號	2011.02.25	蒙華明
04		?????CAP??	2013.11.05	邱明周

Dim.D	NOTE
5.00mm	02pins
6.50mm	03~40pins

Specifications
Current Rating:3.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet Greenconn
requirement for environment protection.



Ordering Information

G PHC101 - XX XX A 049 C 1 B X

No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
E=CAP+Tube
F=CAP+Tape&Reel

38=10U'' gold on contact area/matte tin on other area

格 菱 股 份 有 限 公 司 Greenconn Corporation					GENERAL TOLERANCE		DESIGN: 邱明周	DATE: 2013.11.05	DWG. NO.  GPHC101-CA49CB	TITLE. 2.54 PIN HEADER SINGLE ROW SMT TYPE CONNECTOR
					X.°±5.0°	X.±0.30	CHECKED: 劉北平	DATE: 2013.11.05		
					.X°±3.0°	.X±0.25	AUDITED: 李 輝	DATE: 2013.11.05		
					.XX°±2.0°	.XX±0.15	APPROVED: cc_li	DATE: 2013.11.05		
					.XXX°±1.0°	.XXX±0.10			PART NO. GPHC101-XXXX A049C1BX	
REV. 04	UNIT. mm	SCALE. 3:1	PAGE. 1/1							