

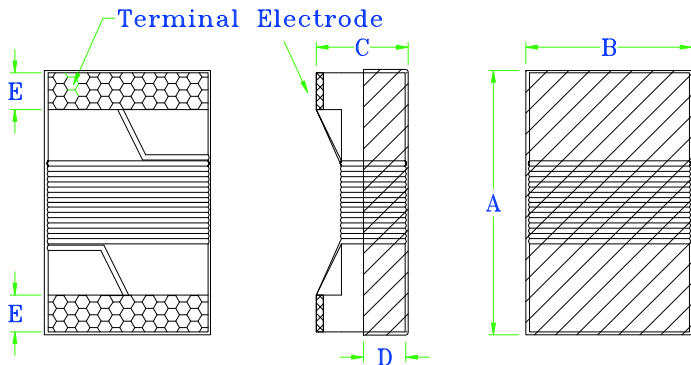
ECN HISTORY LIST

[illegible]

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw

SPECIFICATION FOR APPROVAL

COMMODITY	HIGH FREQUENCY WOUND CHIP INDUCTOR	SPEC NO.	SP-060926065
ITEM	JWI 0603C-8N2J Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.60	±0.2
	B	1.05	±0.2
	C	1.05	±0.2
	D	0.50	(REF)
	E	0.35	±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	8.2 ± 5%	nH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	250	MHz	
Q	30	(min)	
TEST FREQUENCY	250	MHz	
SRF	4600	(min) MHz	
RDC	0.10	(max) Ω	
IDC	700	(max) mA	

REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			